

## Overview

The CT series low-alternating current sensors can be used to detect very low current levels and for overcurrent protection in electronic appliances.

## Applications

Typical applications include overcurrent detection in microcontroller-based equipment, refrigerators, air conditioners, inductive heating, servo motors, inverters, UPSs and SMPS.

## Benefits

- High sensitivity
- High-performance
- Compact and lightweight
- Mountable on printed circuit boards
- RoHS compliant



CT-05 Type



CT-06 Type




CT-07 Type

## Ordering Information


| CT-    | 06-                  | 50                                                                                      |
|--------|----------------------|-----------------------------------------------------------------------------------------|
| Series | Shape Classification | Number of Turns                                                                         |
| CT     | 05<br>06<br>07       | Blank (CT-05 only) = 500 turns<br>50 = 500 turns<br>75 = 750 turns<br>100 = 1,000 turns |

## Dimensions in mm


CT-05

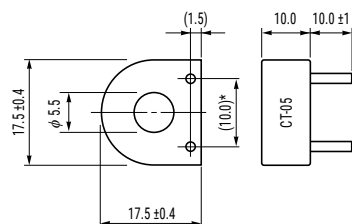

CT-06

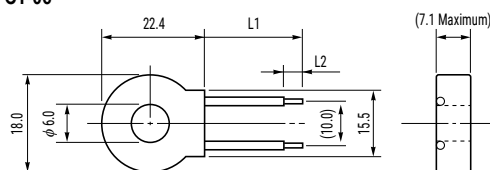


CT-07

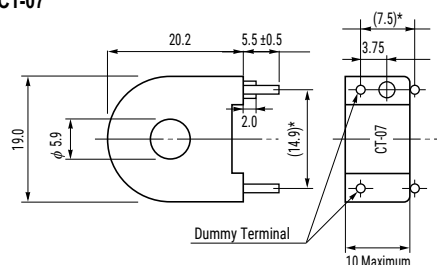


| Part Number | L1 ( $\pm 5$ ) | L2 ( $\pm 2$ ) |
|-------------|----------------|----------------|
| CT-06-50    | 56.0           | 4.0            |
| CT-06-75    |                |                |
| CT-06-100   | 85.0           | 5.0            |

## AC Output Characteristics


**CT-05, CT-07 (example)**

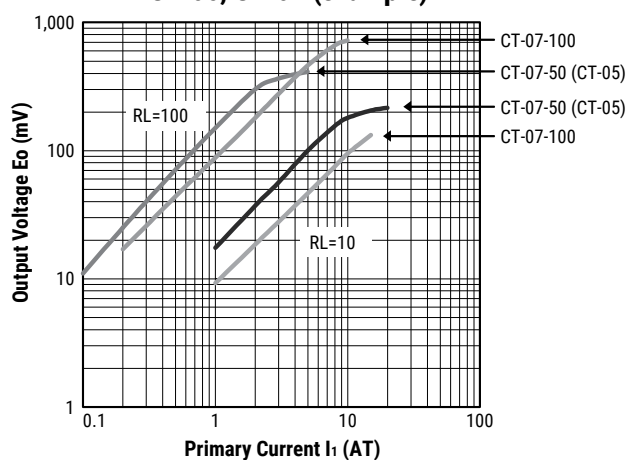

**CT-06 (example)**

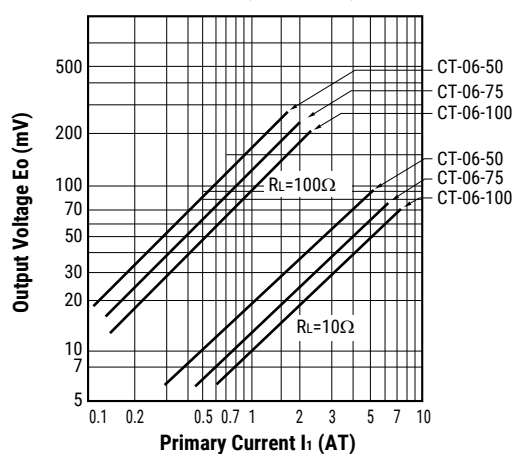

## Measuring Circuit



$I_1$  : primary current (AT)  
 $R_L$  : load resistance ( $\Omega$ )  
 $E_o$  : output voltage (mV<sub>rms</sub>)

## Environmental Compliance

All CT sensors are RoHS compliant.



## Specifications

| Item                        | Performance Characteristics |
|-----------------------------|-----------------------------|
| Hole Diameter               | 5.5 – 6.0 mm                |
| Turns                       | 500 – 1,000                 |
| Operating Temperature Range | -20°C to +80°C              |
| Storage Temperature Range   | -5°C to +40°C               |

### Table 1 – Ratings & Part Number Reference

| Part Number | Hole Diameter (mm) | Turns | Core      | Lead Wires                                  | Material                            | Weight (g) |
|-------------|--------------------|-------|-----------|---------------------------------------------|-------------------------------------|------------|
| CT-05       | Φ 5.5              | 500   | Permalloy | Φ 0.6 mm pin connectors                     | Phenolic resin case, epoxy-filled   | 4.4        |
| CT-06-50    | Φ 6.0              | 500   | Permalloy | Polyethylene sheath<br>Φ 0.5 mm single wire | Phenolic resin case, silicon-filled | 4.5        |
| CT-06-75    | Φ 6.0              | 750   | Permalloy | Polyethylene sheath<br>Φ 0.5 mm single wire | Phenolic resin case, silicon-filled | 4.8        |
| CT-06-100   | Φ 6.0              | 1,000 | Permalloy | Polyethylene sheath<br>Φ 0.5 mm single wire | Phenolic resin case, silicon-filled | 5.0        |
| CT-07-50    | Φ 5.9              | 500   | Permalloy | Φ 0.8 mm pin connectors                     | Phenolic resin case, epoxy-filled   | 5.4        |
| CT-07-100   | Φ 5.9              | 1,000 | Permalloy | Φ 0.8 mm pin connectors                     | Phenolic resin case, epoxy-filled   | 5.6        |

## Soldering Process

### CT-05 & CT-07 Type

|                |                        |                   |
|----------------|------------------------|-------------------|
| Flow Soldering | Preheating temperature | 90 – 150°C        |
|                | Preheating time        | within 90 seconds |
|                | Heating temperature    | 260°C             |
|                | Heating time           | within 5 seconds  |
| Iron Soldering | Temperature of tip     | 350°C or lower    |
|                | Worktime               | within 3 seconds  |

### CT-06 Type

|                |                    |                  |
|----------------|--------------------|------------------|
| Iron Soldering | Temperature of tip | 350°C or lower   |
|                | Worktime           | within 3 seconds |

## Packaging

| Type  | Packaging Type | Pieces Per Box |
|-------|----------------|----------------|
| CT-05 | Tray           | 1,200          |
| CT-06 |                | 560            |
| CT-07 |                | 1,200          |

## Handling Precautions

### Precautions for Product Storage

Current sensors should be stored in normal working environments. While the sensors are quite robust in other environments, exposure to high temperatures, high humidity, corrosive atmospheres, and long-term storage degrade solderability.

KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine and sulfur-bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Avoid storage near strong magnetic fields, as they can magnetize the product and cause its characteristics to change.

For optimized solderability, the stock of current sensors should be used within 12 months of receipt.

### Before Using Low Alternating Current Sensors

- Do NOT drop or apply any other mechanical stress, as such stresses may change performance characteristics.
- Conduct a preliminary study when heating by current conduction (required).
- Do NOT use the low alternating current sensors opened between secondary output terminals. Heat build-up in the magnetic core may occur, resulting in damage to the parts by coil melting.

## KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit [www.kemet.com/sales](http://www.kemet.com/sales).

---

## Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

When providing KEMET products and technologies contained herein to other countries, the customer must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the International Traffic in Arms Regulations (ITAR), the US Export Administration Regulations (EAR) and the Japan Foreign Exchange and Foreign Trade Act.

*KEMET is a registered trademark of KEMET Electronics Corporation.*