



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:High Temp Nylon+30%CF BLACK

b.CONTACT:SUS304

(SURFACE PLATING: Ni-PLATING)

SEE ORDERING INFORMATION

2.ELECTRIC:

a.DIELECTRIC VOLTAGE: 500V AC ONE MINUTE

b.OPERATING TEMPERATURE: -10°C~ +80°C

ORDERING INFORMATION
BH-123A-A5BJ004

电池盒

电池型号

DIP 90° TYPE

PLATING:

A-Au-PLATING

J-Ni-PLATING

K-Sn-PLATING

MATERIAL:

1A-PP BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK


5A-PA9T BLACK

5B-NYLON BLACK


工程部

2022-12-05

H. WANG

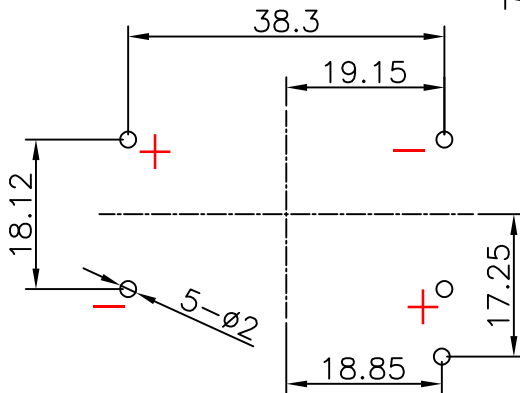

PCB Layout Diagram
Top View

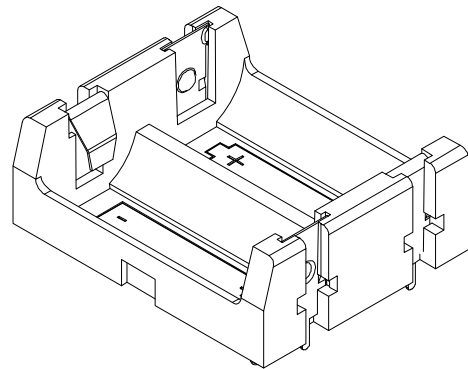

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	WangHeng	DATE	2022-12-05
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2022-12-05
X.X :±0.25	X.X :±0.5°	APVD	XueShunyong	DATE	2022-12-05
X.XX :±0.20		WEIGHT:	SCALE:	SIZE: A4	VIEW:
X.XXX :±0.10		SHEET 1 OF 1	UNIT: mm	REV.: A/0	OBJECT: MY
				TITLE:	
				电池盒BH-CR123A-2J Ni DIP	
				PART NO.:	
				BH-123A-A5BJ004	
				DRAW NO.:WD-CP-0242	

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
2	TERMINAL	1	SUS304, ø0.35MM	Ni-Plating
1	HOUSING	1	High Temp Nylon+30%CF	BLACK