

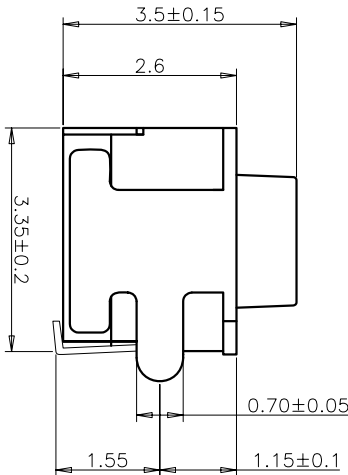
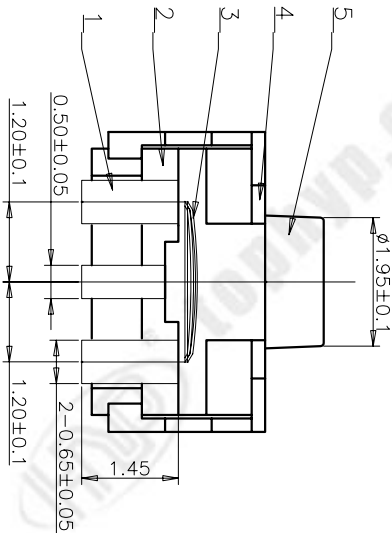
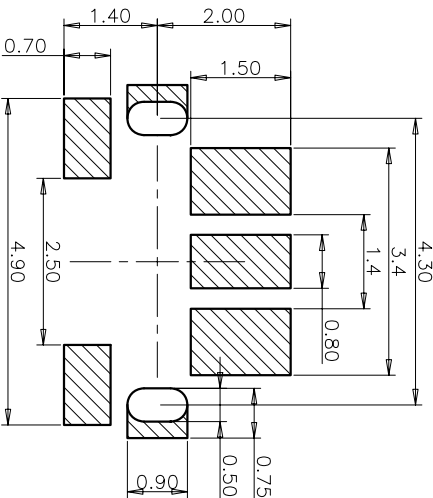




规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	100mΩ max.
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50-60Hz) 60S min.
操作力 Operation force	250±50gf
寿命试验 Operating Life	100,000 cycles
行程 Travels	0.15±0.1mm
包装数量 Package	2000PCS/Reel

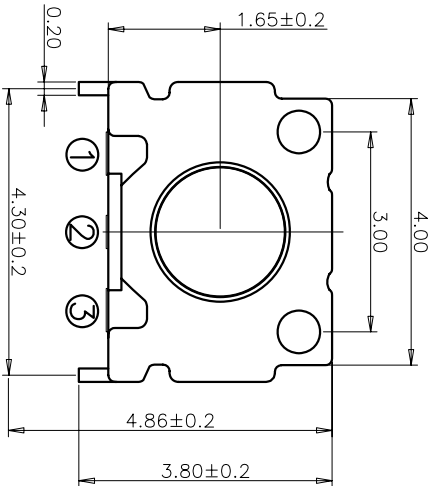

P.C.B LAYOUT

PRODUCT NO.: 1TS022A***-3500A3-CT

- 轻触开关
4. 5X3.35 系列
- 外形:
- 按钮颜色:
- 底座颜色:
- 盖板颜色:
- 初始颜色, 则不启用
- 操作力度:
- 160=160gf
- 250=250gf
- 手感:
- 0=常规
- 1=大手感
- 2=小手感
- 3=特殊手感
- 材料:
- 0=初始材料
- 1=新增材料
- 依次增加
- 产品高度(H):
- 350=3.50mm
- 非编带
- 非编带, 不启用

5	ACTUATOR	1	LCP	WHITE
4	COVER	1	磷铜	Ag-PLATED
3	DOME	2	SUS301	Ag-PLATED
2	HOUSING	1	LCP	BLACK
1	TERMINAL	3	磷铜	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH

X. ± 0.3	X' ± 3'	UNITS	MM	NAME(INTENDED USE)	4.5X3.4	HON YUAN
X ± 0.2	X' ± 2'	MAT'L		TACT SWITCH		HON YUAN PRECISION IND. CO.,LTD.
.XX ± 0.1	.XX' ± 1'	FINISH		PART NO.(INTENDED USE)	1TS022A-2500-3500A3-CT	SHEZHEN, CHINA.
.XXX ± 0.05	.XXX' ± 0.5'			APPD:	W.P.LU 2023-12-11	PRODUCT DRAWING
				CHKD:	S.L.Li 2023-12-11	DWG NO.:
				DR:	K.Ding 2023-12-11	1TS022A-2500-3500A3-CT
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO.,LTD. AND ARE NOT TO BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.				SCALE	10/1	REV.
					1/1	A