



RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

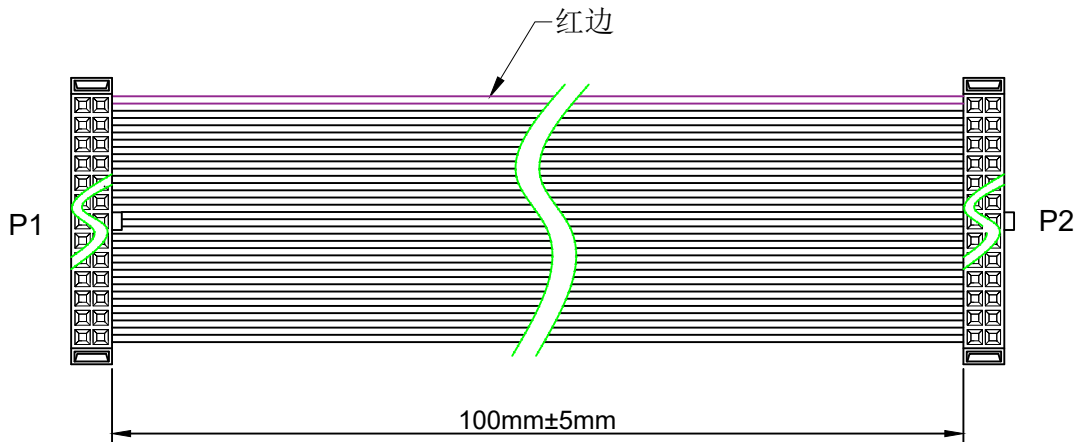

*MATERIAL (IDC)
INSULATOR:PBT (UL 94V-0)
Contact:Copper Alloy.
Contact Plated:Gold or Tin over Nickel Plated.
*SPECIFICATIONS
TEMPERATURE RANGE:-20°C TO-105° C
CONTACT RESISTANCE:3Ω MAX.
TNSULATION RESISTANCE:5MΩ MIN.
WITHSTANDING VOLTAGE:300V 10S

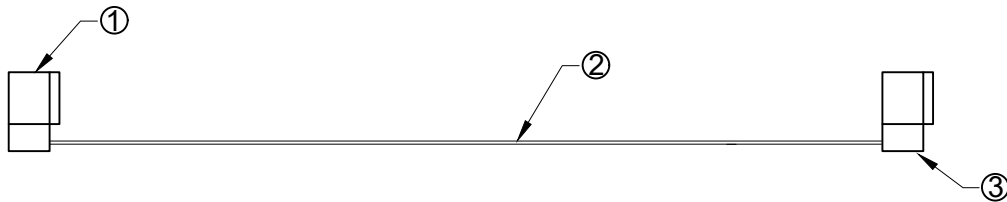

序号	名称	规格描述	数量
①	插头	IDC-50P 1.27mm	2
②	电线	UL2678 30AWG 0.635间距灰排 7/0.10TS	50P
③	卡扣	一个凸点朝外，一个凸点朝内同向50P（1.27mm）	2

X.±0.50	X.°±	PART NO: CL1272250100BQ10E	XFCN 兴飞连接器					
.X±0.25	.X°±							
.XX±0.15	.xx°±		0769-82001899					
.XXX±0.10	.xxx°±		www.xfconn.com					
UNITS:	mm		DWG NO: /					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD		VIEW				
		CHKD						
		DRAW		Wang		SCALE	SHEET	REV
		DATE		2023.11.25		NONE	1:1	A1

