





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST RELEASE	28APR2016	A.D	SY.W
	A1	ECR-16-013644	25SEPT2016	A.D	SY.W
	A2	ECR-17-004532	19JUN2017	A.D	I.Y
	A4	ECR-19-011810	09JUL2020	A.D	N.Z

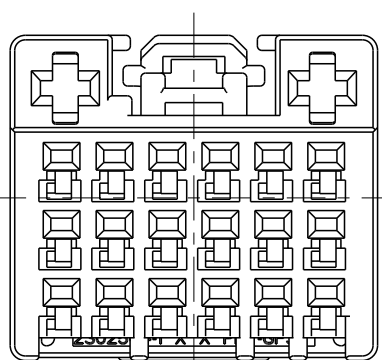

2298671-1
CODING A



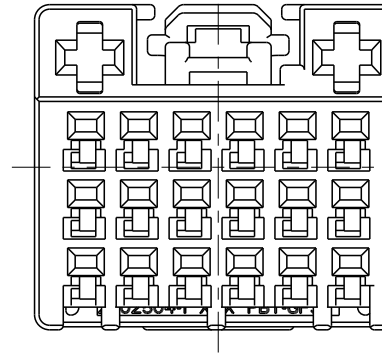


2298671-2
CODING B

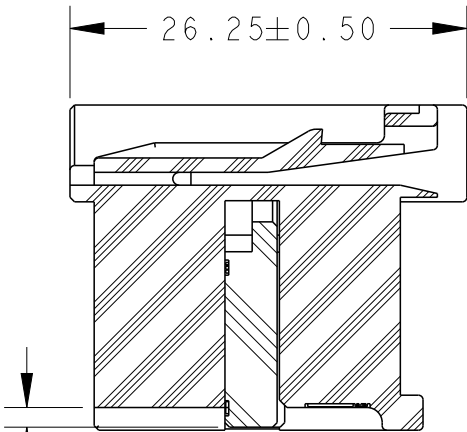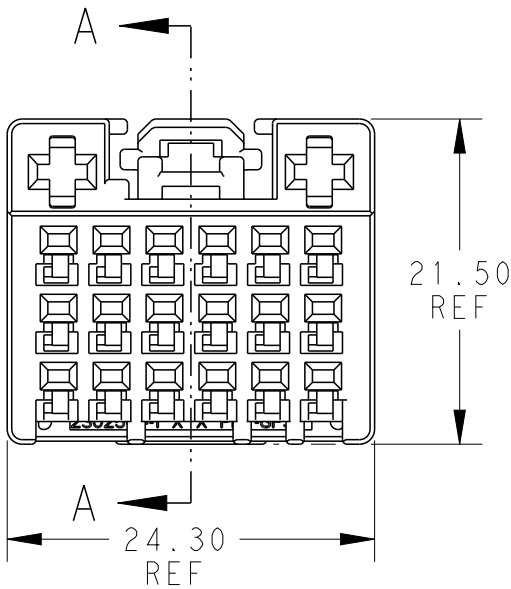

TPA IN
PRE-LOCATION

SECTION A - A

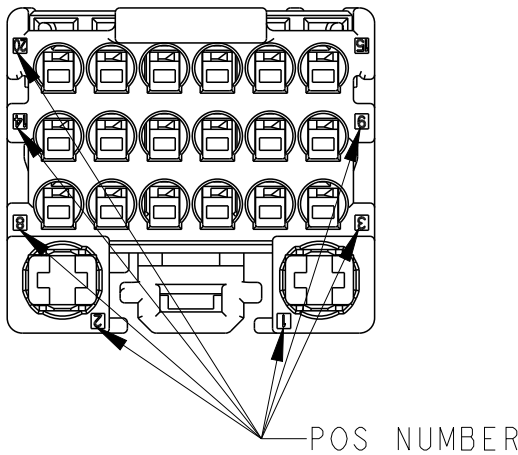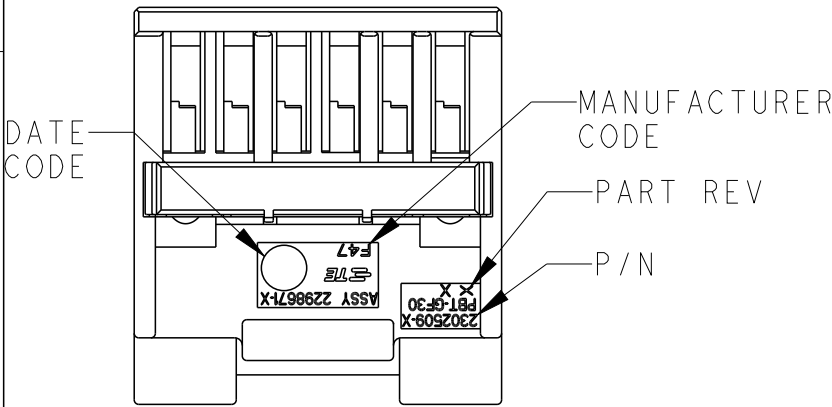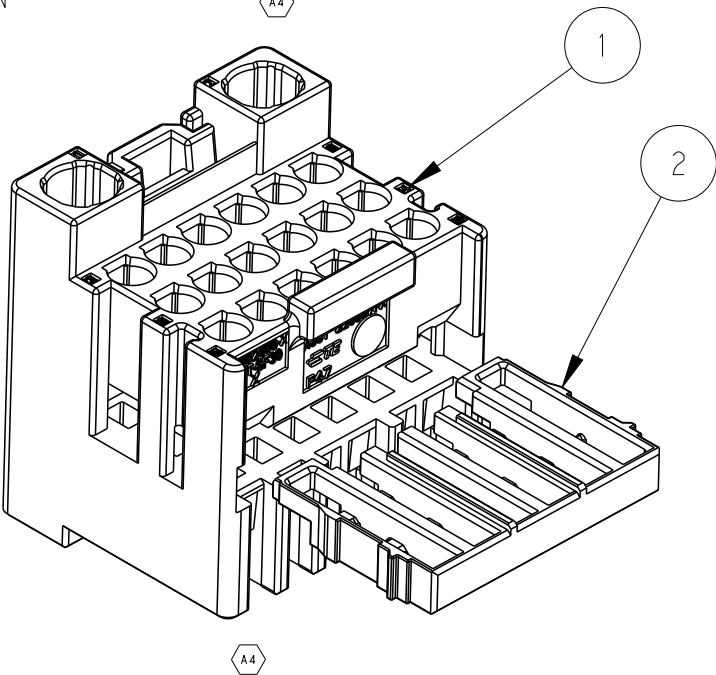

NOTE:

1. TPA SHOULD BE IN PRE-LOCK STATUS
2. PRODUCT SPEC 108-101431
APPLICATION SPEC 114-101077
3. MATING PART IS 2298672-X
4. APPLICABLE CONTACT AND WIRE SIZE SEE TABLE.

CONTACT SIZE(MM)	WIRE SIZE(MM2)	INSULATION DIA(MM)	CONTACT	PLATING
1.2	0.22-0.35	1.1-1.4	2296537-1	PRE-TIN
	0.5-0.75	1.4-1.9	2296537-2	PRE-TIN
	1.0-1.5	1.9-2.4	2296537-3	PRE-TIN
2.8	0.5-1.0	1.4-2.1	1241388-1	PRE-TIN
	>1.0-2.5	2.2-3.0	1241390-1	PRE-TIN
	>2.5-4.0	2.7-3.7	1-968853-1	PRE-TIN

2	TPA REC HSG, 20POS, HYBRID	PBT-GF30 NATURE	1	1
1	20POS, HYBRID, REC HSG, UNSLD, COD B	PBT-GF30 BLACK		1
	20POS, HYBRID, REC HSG, UNSLD, COD A		1	
NO	DESCRIBE	MATERIAL	XXX-1	XXX-2
			ASSY P/N	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0-PLC ±

1-PLC ±0.1

2-PLC ±0.01

3-PLC ±0.001

4-PLC ±0.0001

ANGLES ±

MATERIAL

-

-

FINISH

-

-

DWN
A.DANG
28APR2016

CHK
SY.WANG
28APR2016

APVD
SY.WANG
28APR2016

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

NAME
20W MIXED PLUG HSG 18XMCON AND 2XMCP

SIZE
A3

CAGE CODE
-

DRAWING NO
C-2298671

RESTRICTED TO
-

SCALE
2:1

SHEET
1 OF 1

REV
A4

TE Connectivity