



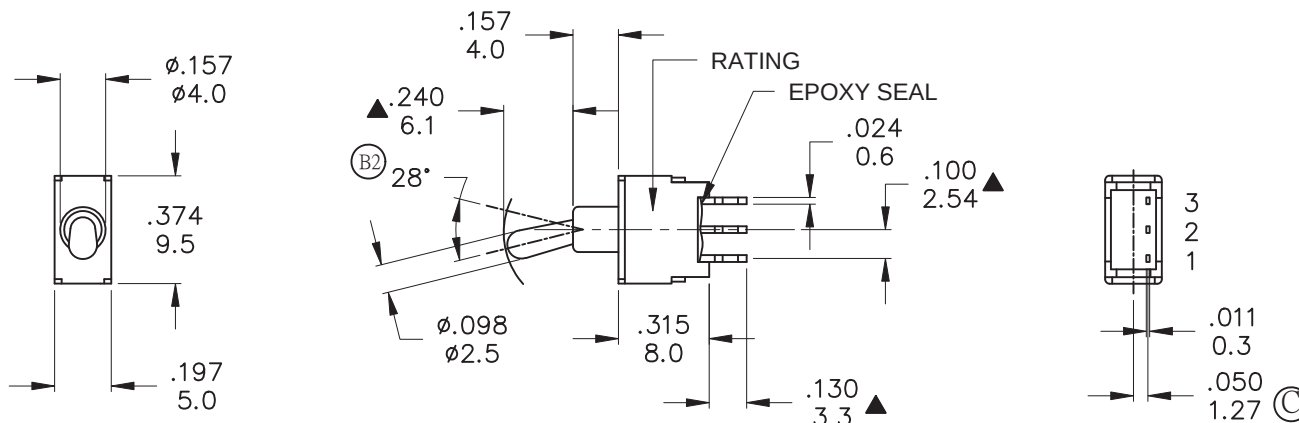

Model No.	POS.1	POS.2	POS.3
2TES1	ON	NONE	ON
Term. Comm.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

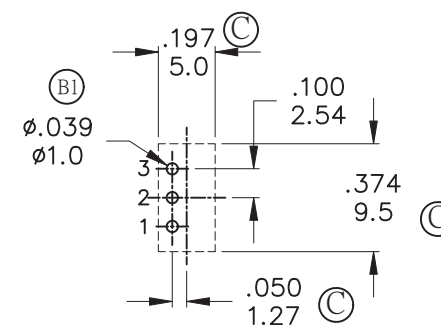

P.C. MOUNTING



SPECIFICATIONS

CONTACT RATING: Max 0.4 VA max @ 48 VAC or DC

MECHANICAL LIFE: minimum 40,000 operations.

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 1,000MΩ min.

DIELECTRIC STRENGTH: 500 Vrms min. @ sea level.

OPERATING TEMPERATURE: -20°C to 85°C.

DEGREE OF PROTECTION : IP67



MATERIALS

ACTUATOR - Brass, chrome plated, internal O-ring seal.

Standard for all actuators.

BUSHING & HOUSING - SPCC

CASE - Glass filled nylon 6/6, flame retardant, heat stabilized (UL94v-0)

CONTACT/TERMINALS - Phosphor bronze gold - plated over nickel barrier.

TERMINAL SEAL - Epoxy

RoHS & Lead Free

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO., LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2 TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 2TESP0002	TITLE 圖名	Subminiature Toggle Switches			SIZE 圖紙	A4
1	Ⓐ		圖面更正	NOV-05-2009		DWG NO. 圖號	2TES1M2RES			UNIT 單位	inch mm
2	Ⓑ1	1.09(.043)	1.0(.039)	AUG-03-2010		REV. 版本	E	DATE 日期	DEC - 24 - 2008	SHEET 張數	1 OF 1
3	Ⓑ2	26°	28°	AUG-03-2010		CHECKED BY 審 核				DRAWN BY 製 圖	IRENE
4	Ⓒ		增加尺寸標示	MAR-01-2017							
5	Ⓓ	30°	20°	AUG-14-2017							