

1000BASE-T SINGLE PORT TRANSFORMER MODULES

Industrial grade



- Compliant with IEEE 802.3 standards
- 350µH OCL with 8mA DC bias at 100KHz 100mV
- Lead finish: Pure tin
- Moisture Sensitivity Level: 1





Electrical Specifications @ 25 °C – Operating Temperature – 40 °C to +85

Part Number	Insertion Loss (dB MAX)	Return Loss (dB MIN)					Crosstalk (dB MIN)			Differential to Common Mode Rejection (dB MIN)			Dielectric Withstanding Voltage @60s (Vrms MIN)
		5 MHz	30 MHz	60 MHz	80 MHz	100 MHz	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz	
R5033NL	-1.2	-18	-18	-14	-12	-10	-33	-30	-25	-43	-37	-33	1500

Notes: 1. Add suffix to part number for Tape & Reel package (ie: **R5033NLT**).

Mechanical

R5033NL

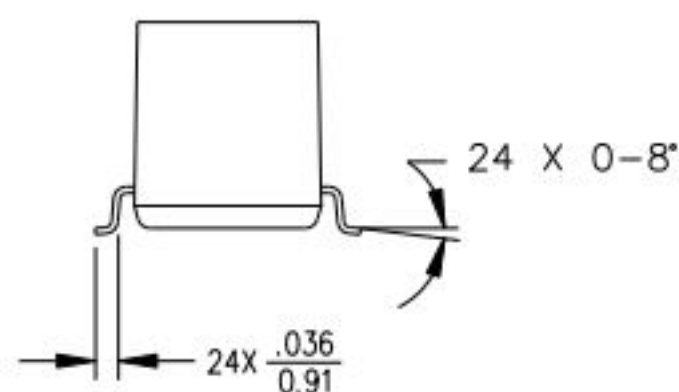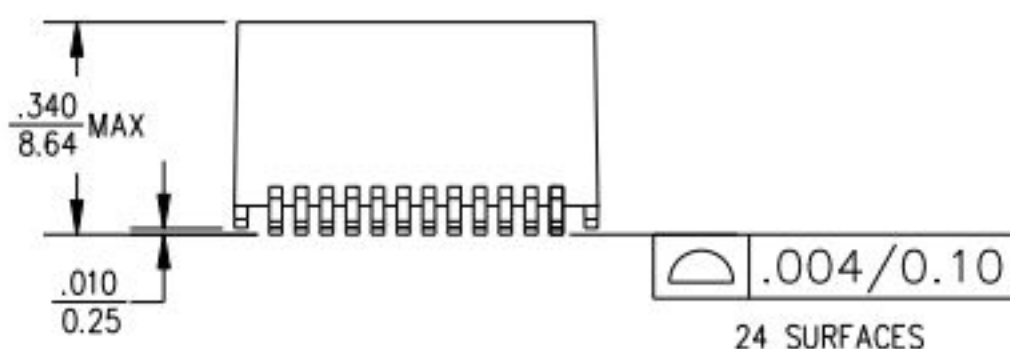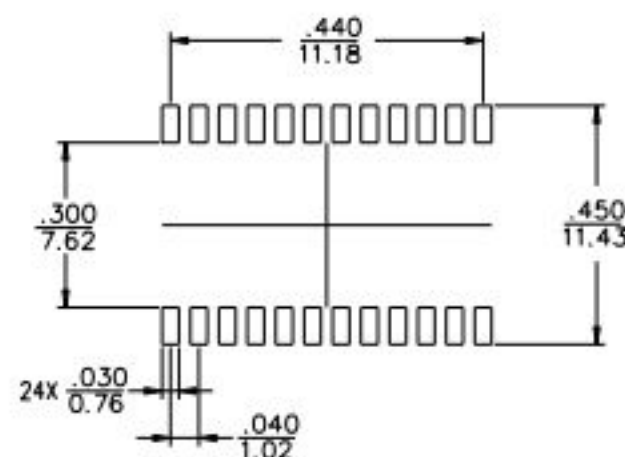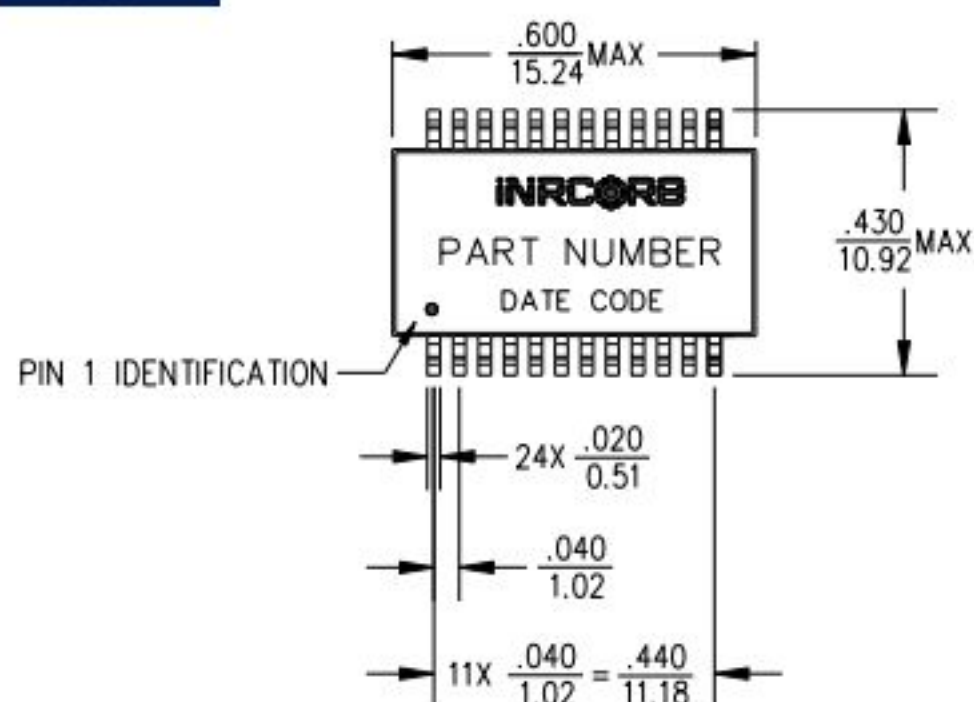

DIMENSIONS: $\frac{\text{INCHES}}{\text{MM}}$
UNLESS OTHERWISE SPECIFIED,
ALL TOLERANCES ARE $\pm \frac{.010}{0.25}$

WEIGHT.....APPROX 2.2GRAMS
TAPE & REEL.....250PCS/REEL
TUBE.....30PCS/TUBE




1000BASE-T SINGLE PORT TRANSFORMER MODULES

Industrial grade




Electrical Schematic

R5033NL

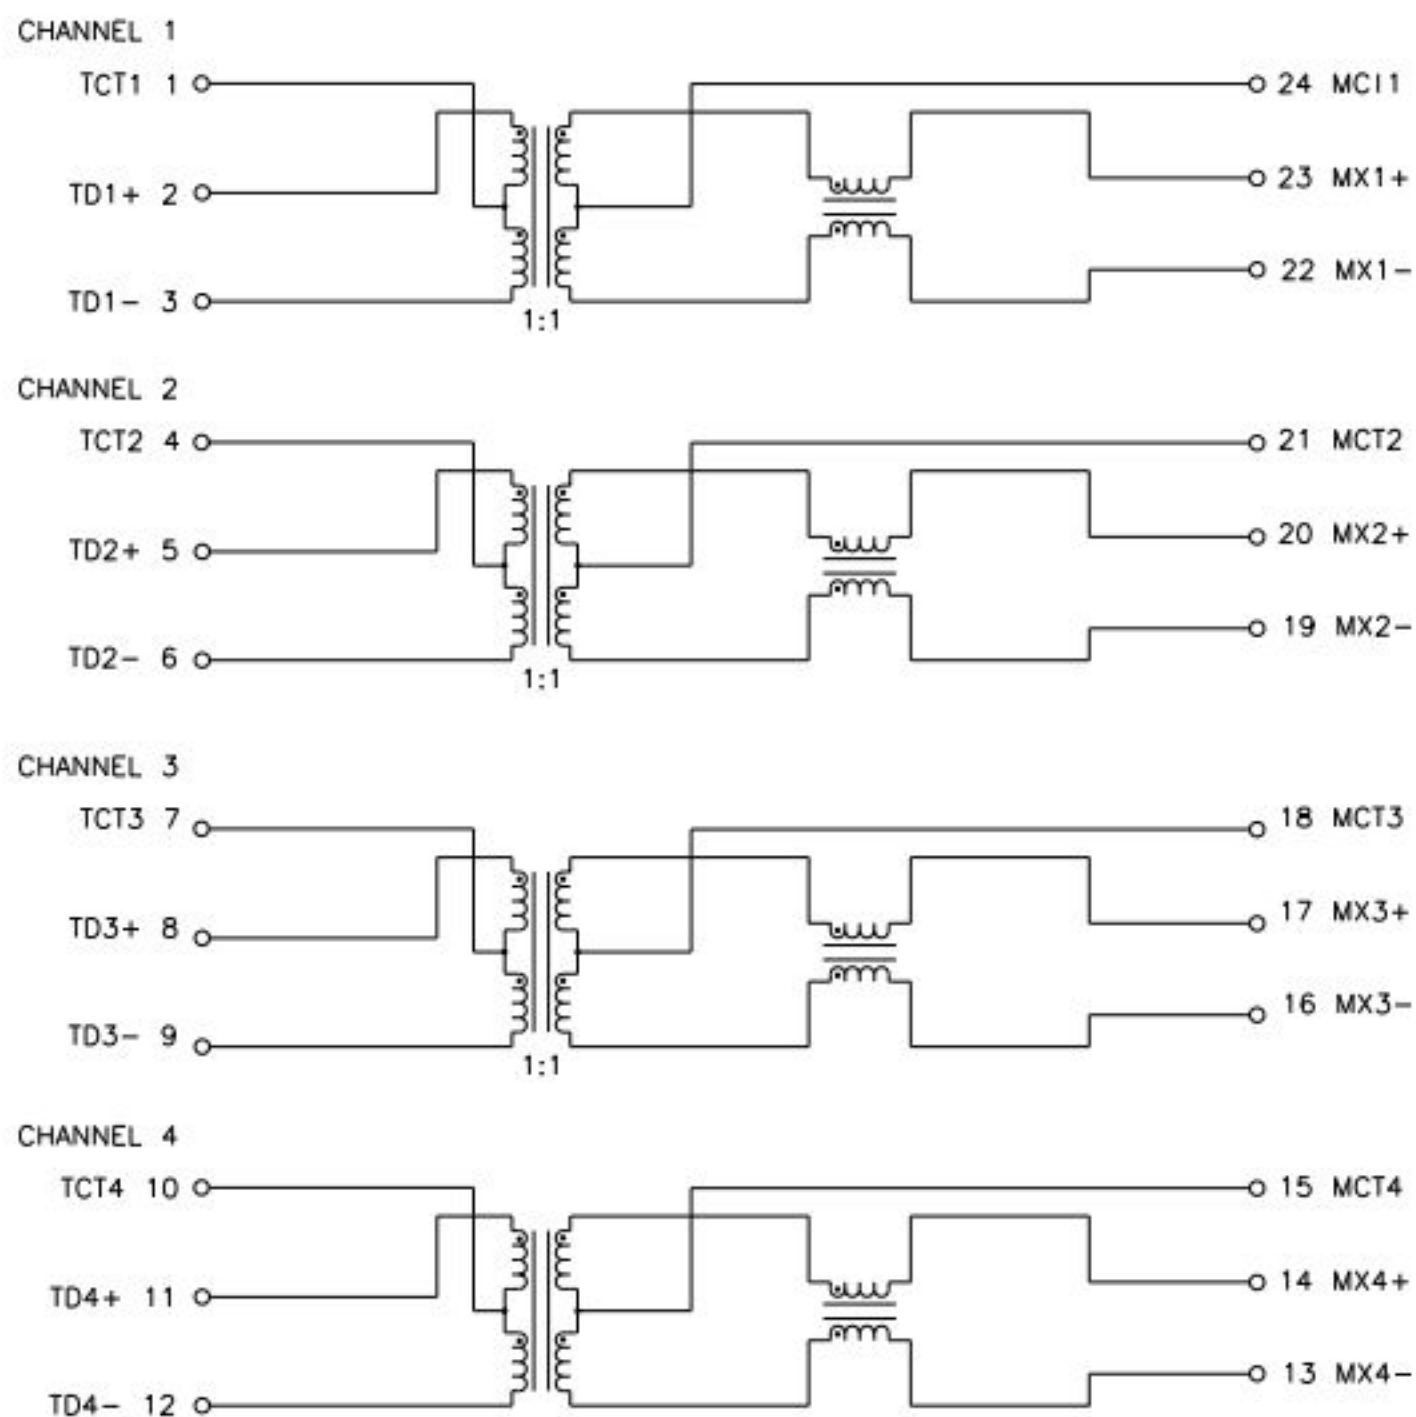

LEGEND

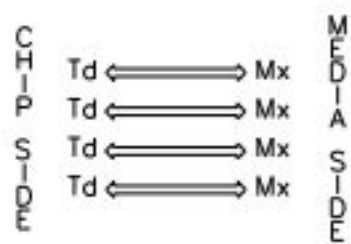

ALL CHANNELS ARE
IN-PHASE BETWEEN
INPUT AND OUTPUT




1000BASE-T SINGLE PORT TRANSFORMER MODULES

Industrial grade



Non-Lead Recommended Reflow Profile (Based on J-STD-020D)

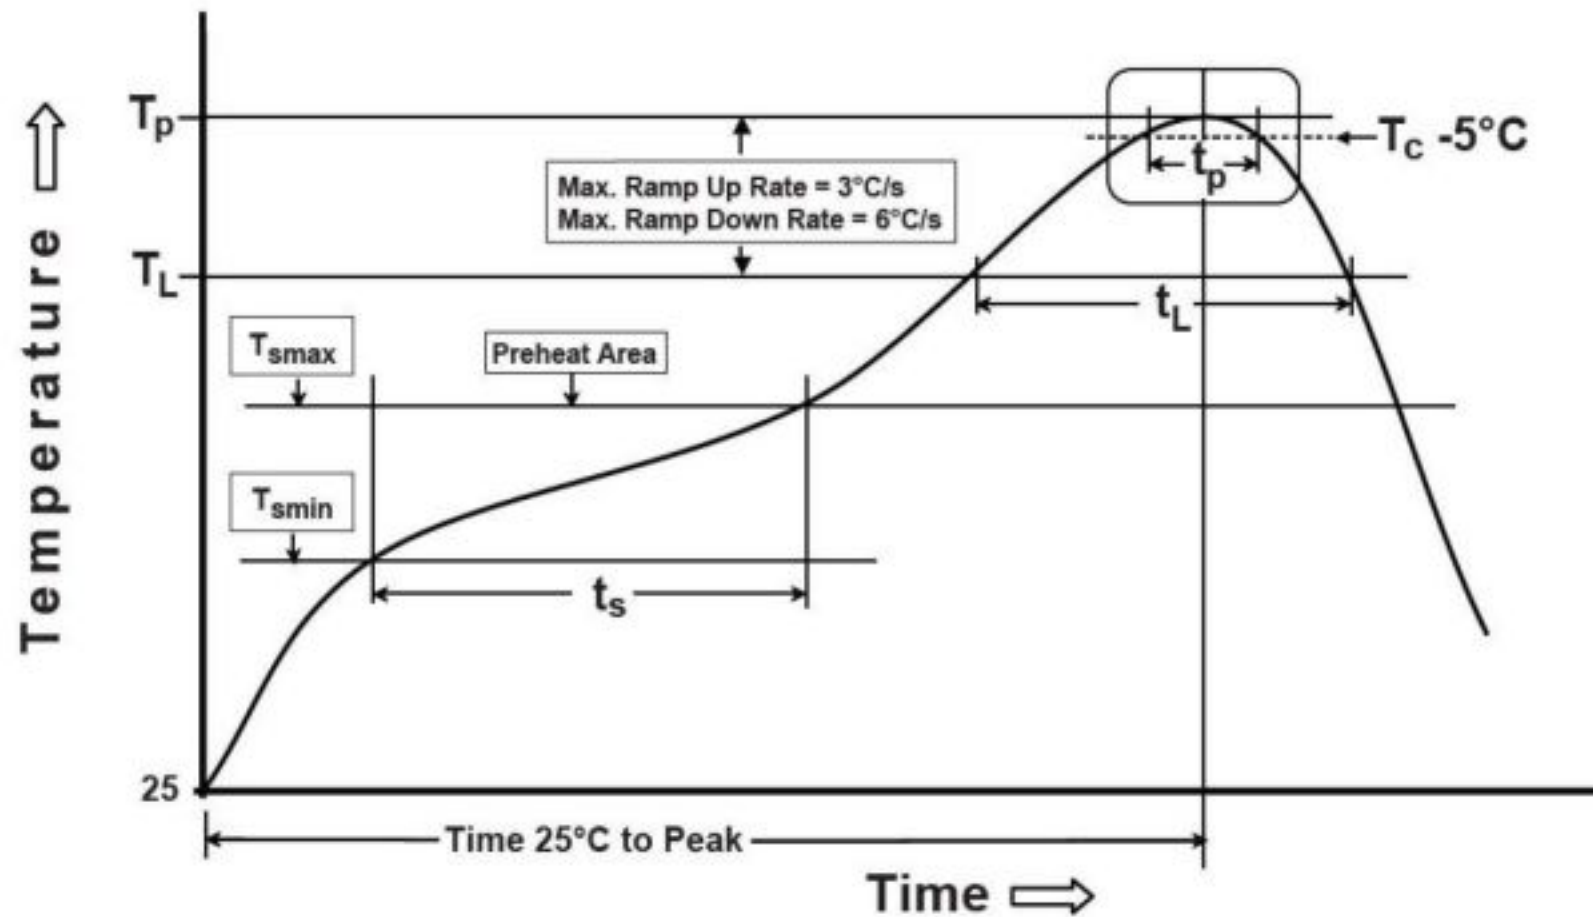

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
150	200	217	245	60-120	60-150	30	3°C/s MAX	6°C/s MAX	480

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC

311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.7816430

Dongguan iNRCORE Co. Ltd

No.7, An Li Road, Changan Town,
Dongguan City, China
Tel: +0769 8165 9962

Global Sales Representatives and Locations:

<http://www.inrcore.com>

