

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECR-16-012823	21OCT2021	RZ	WK

NOTES:

- 1

PACK IN ACCORDANCE WITH TE SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH TE SPEC 107-3275
- 3

Ag PLATING
- 4

Ni PLATING
- 5

THIS ITEM MUST BE WHITE
- 6

HAND TOOL : 9-1478240-0
- 7

DIE SET : 9-1478242-0
- 8

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE: DC - 1 GHz

NOMINAL IMPEDANCE: 75 Ohm

INSULATION RESISTANCE: 5000 MOhm

WORKING VOLTAGE: 500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max

CONTACT RESISTANCE: 1.50 mOhm Max

CENTRE CONTACT: 1 mOhm Max

OUTER CONTACT: 1.3:1 Max @ 0.3 GHz

VSWR: 0.2 dB Max @ 0.3 GHz

INSERTION LOSS dB:
- 9

MECHANICAL CHARACTERISTICS

COUPLING RETENTION FORCE: 170N Min

CABLE RETENTION FORCE: 170N Min


DURABILITY: 500 Cycles Min
- 10

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC
- 11


FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 12

ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

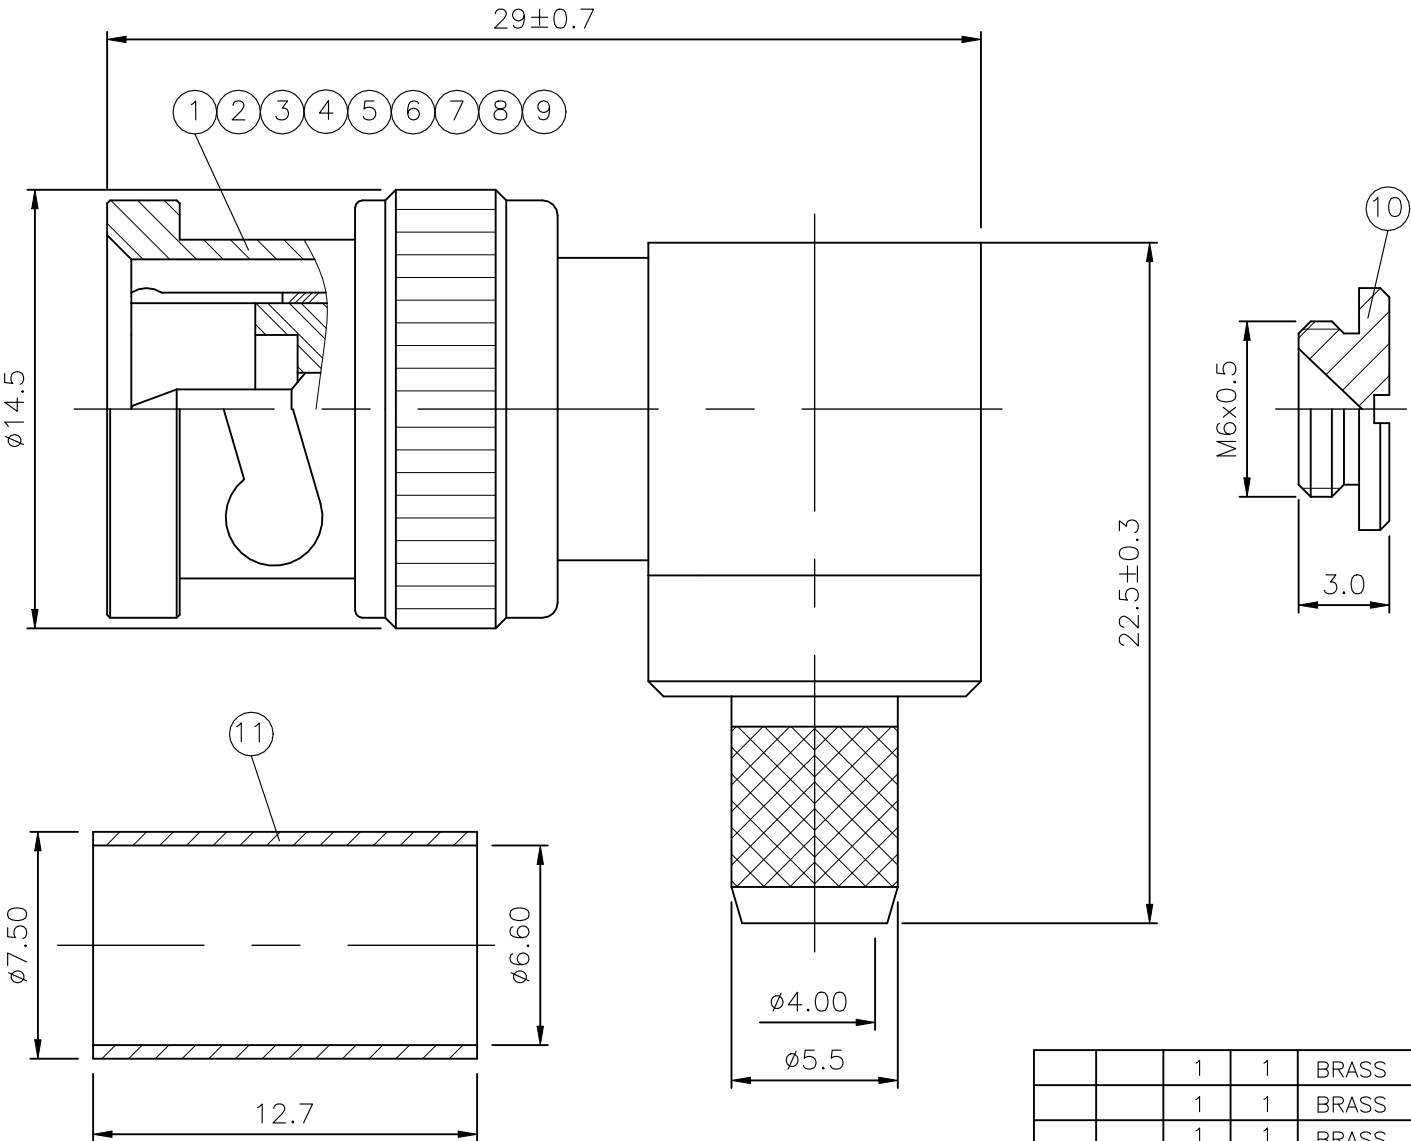

		1	1	BRASS	3	FERRULE	11
		1	1	BRASS	3	NUT	10
		1	1	BRASS	3	BODY	9
		1	1	BRASS	3	BODY	8
		1	1	BRASS	3	BODY	7
		1	1	STEEL	3	RING	6
		1	1	STEEL		SPRING RING	5
		1	1	STEEL	4	C-RING	4
		1	1	SILICONE	5	GASKET	3
		1	1	PTFE		INSULATION	2
		1	1	BRASS	3	SHELL	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM

QUANTITY PER ASSY		PARTS LIST	
		TE Connectivity	
NAME			
BNC ELBOW PLUG CRIMP 75 OHM RG59B/U, 62A/U, 140/U, 210/U, URM90, KX6A, KX25,			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337438	—
		SCALE	SHEET
		NTS	1 OF 1
		REV	E

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	RITA ZUO	28 OCT 2009
		CHK	ANSON MA	28 OCT 2009
		APVD	BOB ZHAO	28 OCT 2009
		PRODUCT SPEC		
		—		
		APPLICATION SPEC		
		411-3247		
		WEIGHT 0.000000		
		CUSTOMER DRAWING		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
mm				
	0 PLC	± -		
	1 PLC	± 0.2		
	2 PLC	± 0.1		
	3 PLC	± -		
	4 PLC	± -		
	ANGLES	± -		
MATERIAL	FINISH			
SEE TABLE	—			