

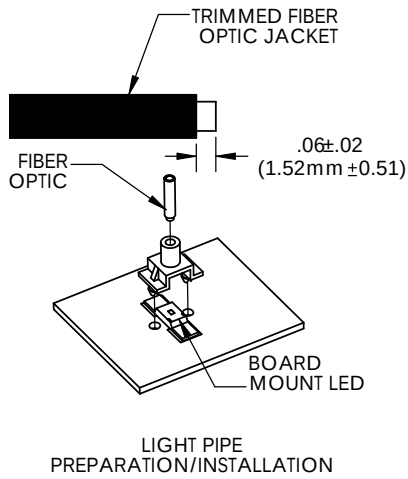


NOTES

1. ROHS COMPLIANT
2. -40°C TO 85°C OPERATING TEMPERATURE
3. SUITABLE FOR LIGHT PIPE WITH $\varnothing 2.2\text{MM}$ JACKET AND OPTICAL CORE NO GREATER THAN $\varnothing 1.5\text{MM}$.
4. DO NOT INSTALL PRIOR TO SOLDERING
5. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN 100mcd

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
177	001	INITIAL RELEASE	8/3/10	KH
200	002	REVISED PER ECR 100610KH010	10/6/10	KH

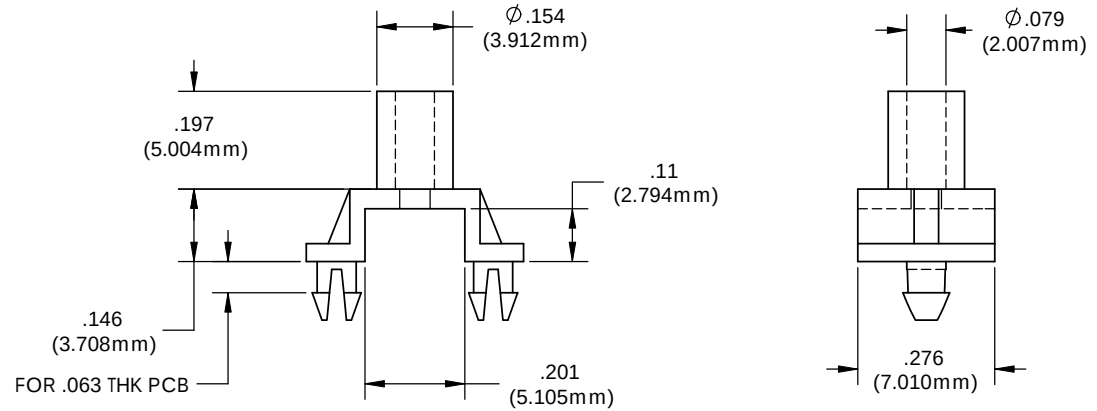

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES DECIMALS ± 1/2° .X ± .020 FINISH .XXX ± .010 .125 ± .005 VIEW ALL CORNERS AND SHARP EDGES (R1 MIN)  THIRD ANGLE PROJECTION PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. AND REPRODUCTION IN PART OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.		MATERIAL NYLON 6/6, BLACK UL 94-V2	VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com			
FINISH SEE NOTES		TITLE: SURFACE MOUNT LED MOUNT				
APPROVAL DRAWN KH 8/3/10 CHECKED DPZ 8/10/10		DATE 8/3/10		SIZE B	DWG. NO. SMD 22	REV 002
DO NOT SCALE DRAWING		SCALE: 4:1		SHEET 1 OF 1		