




DO NOT
SCALE FROM
THIS PRINT

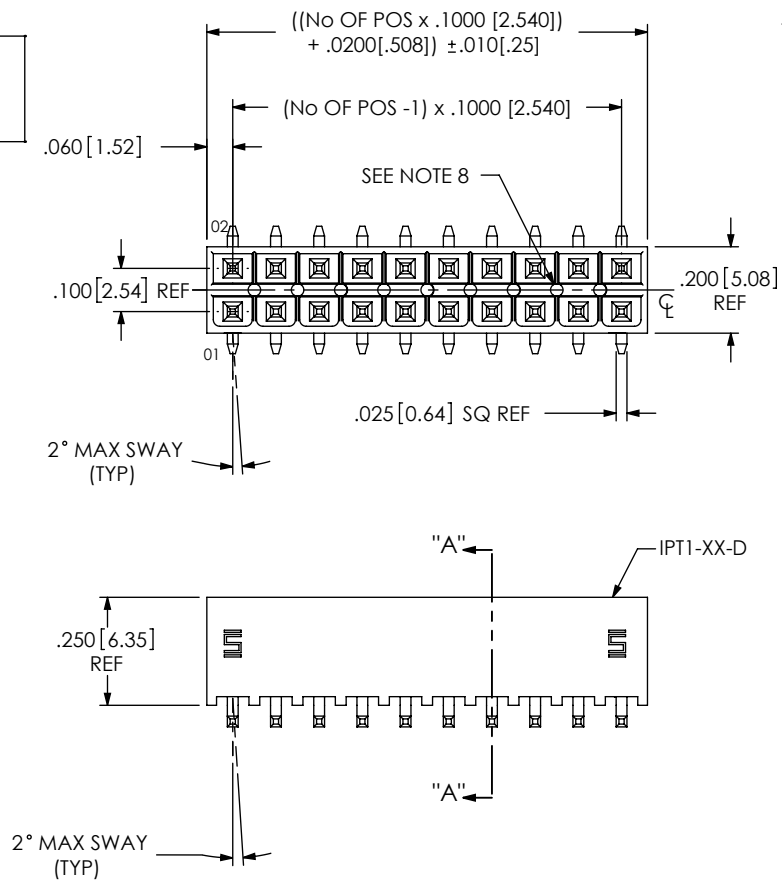

IPT1-1XX-XX-XX-D-VS-XX-X-XX

- No OF POS PER ROW**
-02 THRU -25
- LEAD STYLE**
-01
- PACKAGING**
BLANK: TUBES (SEE NOTE 13)
-TR: TAPE AND REEL (SEE NOTE 14 & 15)
-FR: FULL REEL QTY TAPE & REEL (SEE NOTE 14 & 15)
- PICK & PLACE OPTION**
-K: POLYIMIDE FILM PAD [AVAILABLE ON POSITIONS -03 THRU -25 ONLY] (USE K-DOT-.236-.343-.005, SEE SHT 2, -K OPTION)
- OPTION**
-A: ALIGNMENT PIN (USE SM-A11) [4 POS MIN]
-LC: LOCKING CLIP (USE LC-07-TM) [4 POS MIN] (SEE NOTE 10)
-FL: FRICTION LOCK [POS -05 THRU -25] (USE IPT1-XX-D-FL-X & T-1S64-05-X)
-PL: POSITION #1 REMOVED (USE IPT1-XX-D-P) (SEE NOTE 12)
- TAIL OPTION**
-VS: VERTICAL SURFACE MOUNT
- ROW SPECIFICATION**
-D: DOUBLE (USE IPT1-XX-D) (SEE NOTE 11)

- PLATING SPECIFICATION**
-S: SELECTIVE, 30 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL
-SM: SELECTIVE, 30 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL MATTE TIN ON TAIL
-L: LIGHT SELECTIVE, 10 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL

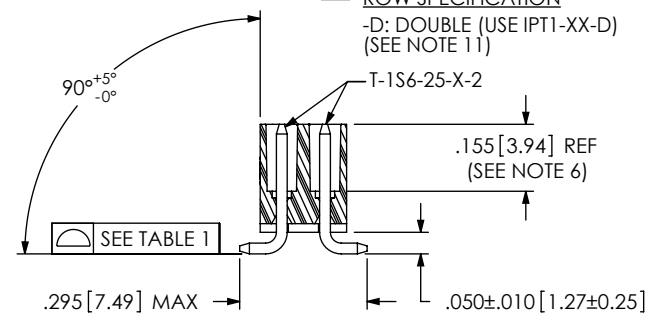


SECTION "A"- "A"

- NOTES:**
1. REPRESENTS A CRITICAL DIMENSION.
 2. MAXIMUM ALLOWABLE CUT FLASH: .010[.25].
 3. MINIMUM TERMINAL PUSH OUT FORCE: 2 lbs.
 4. MAXIMUM VARIATION BETWEEN PIN ROWS: .005[.13].
 5. "END WALLS" AFTER CUTTING SHOULD BE .010+/-0.003[.25+/-0.08].
 6. PINS TO BE FLUSH TO .008 [.20] MAXIMUM RECESSED IN BODY.
 7. ALL DIMENSIONS TO BE ABOUT CENTERLINE WITHIN +/-0.005[.13].
 8. PRESENCE OF VOIDS IS OPTIONAL AND PATTERN TO WHICH THEY OCCUR IS VARIABLE.
 9. NOTE DELETED.
 10. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.
 11. STANDARD BODIES CAN BE CUT TO POSITION. FOR -LC, -FL & -PL OPTIONS, BODIES MUST BE MOLDED TO POSITION.
 12. FOR EXISTING CUSTOMERS ONLY, -POL CAN BE SUBSTITUED FOR -PL.
 13. TUBES ARE STANDARD PACKAGING.
 14. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM
 15. ATTACH LABEL TO EACH REEL

TABLE 1	
POSITION	COPLANARITY
-02 THRU -10	.005[.13]
-11 THRU -25	.006[.15]


PACKAGING VIEW

[-02 POSITION TO BE BULK PACKAGED]




TUBE: PT-1-24-01-103
PLUG: TP-09

-TR: TAPE & REEL PACKAGING OPTION

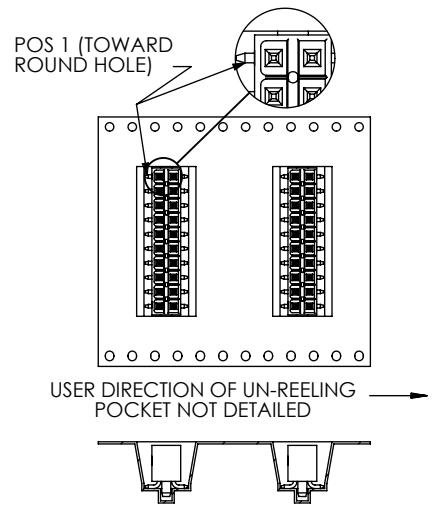

IN-PROCESS



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01[.3] ± 2°
.XXX: ±.005[.13]
.XXXX: ±.0020[.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.




MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2.25:1
INSULATOR: LCP, UL 94 VO, COLOR: BLACK
CONTACT: PHOS BRONZE, 510, 3/4 HARD

DESCRIPTION:
.100 DOUBLE ROW SHROUDED TERMINAL ASSEMBLY
DWG. NO.
IPT1-1XX-XX-XX-D-VS-XX-X-XX
BY: DEAN P 11-06-2002 SHEET 1 OF 2


-FL: FRICTION LOCK OPTION

IPT1-110-01-X-D-VS-FL SHOWN

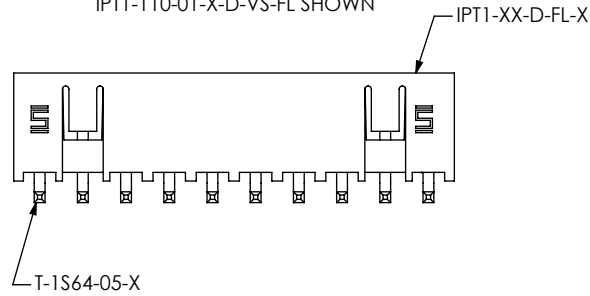


-A: ALIGNMENT PIN OPTION

IPT1-110-01-X-D-VS-A SHOWN

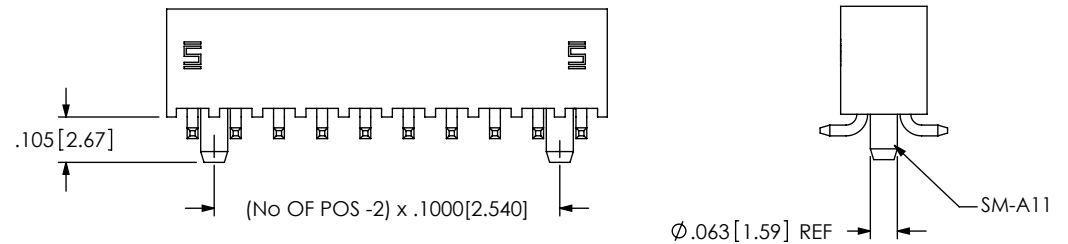


-PL: POLARIZED OPTION

IPT1-110-01-X-D-VS-PL SHOWN

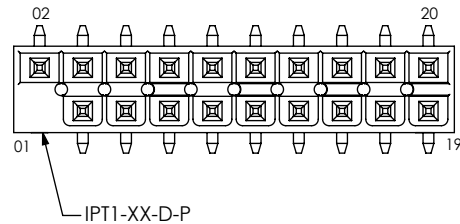

-K: POLYIMIDE FILM PAD OPTION


[AVAILABLE ON POSITIONS -03 THRU -25 ONLY]

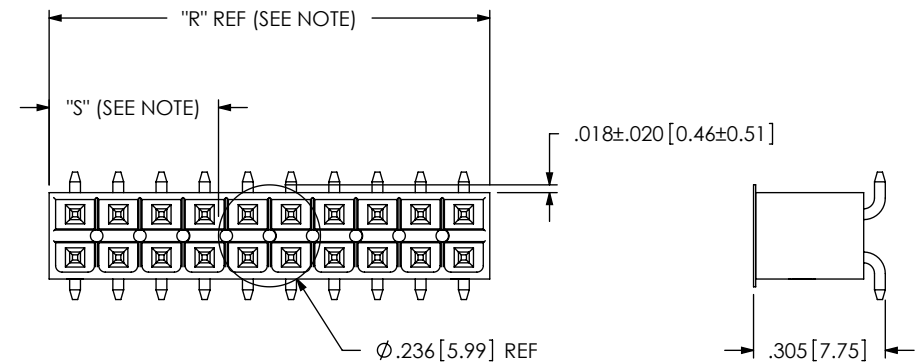

NOTE: "R" = USE MEASURED DIMENSION
"S" = (("R" - .2362[6.000]) / 2) ±.020[.51]

-LC: LOCKING CLIP OPTION

IPT1-110-01-X-D-VS-LC-FL SHOWN

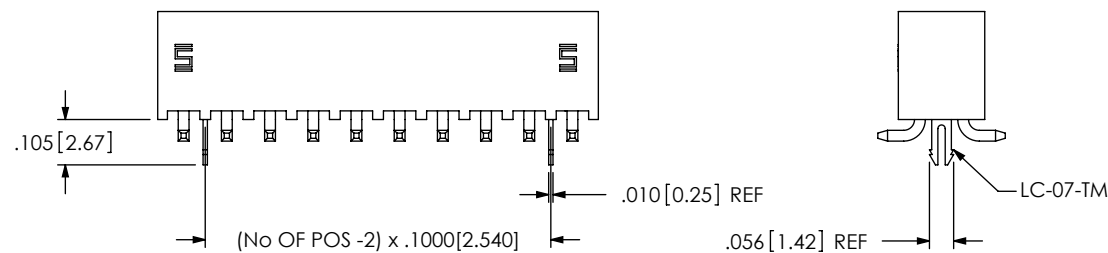

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	samtec 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322
DO NOT SCALE DRAWING	DESCRIPTION: .100 DOUBLE ROW SHROUDED TERMINAL ASSEMBLY
SHEET SCALE: 2.25:1	DWG. NO. IPT1-1XX-XX-XX-D-VS-XX-X-XX
	BY: DEAN P 11-06-2002 SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[IPT1-113-01-L-D-VS](#) [IPT1-115-01-L-D-VS-LC-K](#) [IPT1-125-01-L-D-VS-LC](#) [IPT1-110-01-L-D-VS-A-TR](#)