
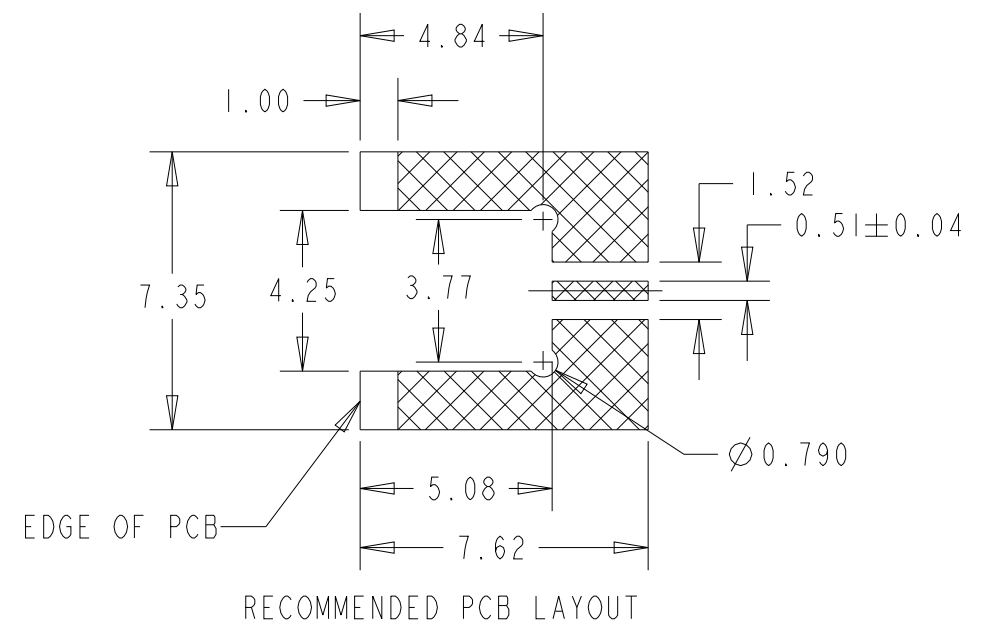



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECN-22-154772	17MAY2022	RZ	WK

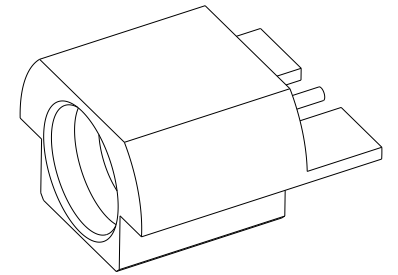

ELECTRICAL		MECHANICAL		ENVIRONMENTAL	
IMPEDANCE (OHM)	50	INTERFACE DIMENSION MIL-STD-348B FIG. 326-2		TEMPERATURE RANGE -40°C TO +165°C	
FREQUENCY RANGE (GHZ)	DC TO 40	FORCE TO ENGAGE AND DISENGAGE N/A		THERMAL SHOCK MIL-STD-202, METH.107, COND.A	
VOLTAGE RATING (PEAK) SEA LEVEL	250 VRMS	CENTER CONTACT CAPTIVATION AXIAL(N) 6.8 RADIAL(N.m) N/A		CORROSION MIL-STD-202, METH.101, COND.B	
INSULATION RESISTANCE (MIN) 5000 MOHMS		CABLE RETENTION AXIAL(N) N/A RADIAL(N.m) N/A		VIBRATION MIL-STD-202, METH.204, COND.D	
CONTACT RESISTANCE (MILLIOHMS MAX) CENTER CONTACT 6.0 OUTER CONTACT 2.0		MATING CYCLES 500 CYCLES		SHOCK MIL-STD-202, METH.213, COND.I	
DIELECTRIC WITHSTAND VOLTAGE (MIN) 500 VRMS				MOISTURE RESISTANCE MIL-STD-202, METH.106.	
INSERTION LOSS 0.10*SQRT(F) dB				ROSH COMPLIANT	
VSWR 1.10+0.05*SQRT(F)					
RF LEAKAGE N/A					

			I	-	PTFE	DIELECTRIC	3		
			I	Au 0.76um	BeCu	CENTER CONTACT	2		
			I	Au 0.76um	BRASS	BODY	1		
			-I	PLATING	MAT'L	DESCRIPTION	ITEM		
				REVISION OF EACH ASSY NO(WHEN BLANK, USE DWG REVSION)					
QTY REQD PER ASSY			PARTS LIST						
DWN	10SEP2019			 TE Connectivity					
RANDY Z									
CHK	10SEP2019			NAME SMP, PLUG, FULL DETENT EDGE LAUNCH, PCB MOUNT -					
ERIC D									
APVD	10SEP2019			SIZE A3					
WENKE H									
PRODUCT SPEC				CAGE CODE		DRAWING NO		RESTRICTED TO	
-				00779		G-2394795			
APPLICATION SPEC								-	
-									
WEIGHT								A	
-									
CUSTOMER DRAWING					SCALE	10:1	SHEET	OF	REV

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
	0 PLC	±	0.001
	1 PLC	±	0.005
	2 PLC	±	0.013
	3 PLC	±	0.013
	4 PLC	±	0.0001
	ANGLES	±	5
MATERIAL	FINISH		
-	-		
-	-		