
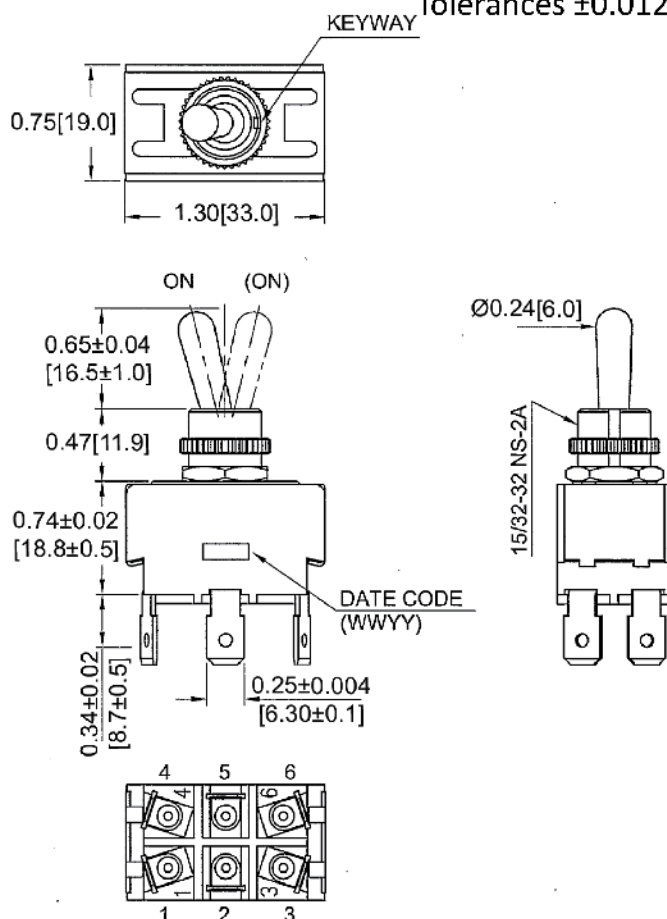


## Mechanical Dimensions: Inches [mm]

Tolerances  $\pm 0.012$  [0.3] Unless Otherwise Specified


## Mounting Hole



Thickness: 0.24 [6.0mm] max

## Circuit Diagram

6P DPDT ON-(ON)



## Electrical Specifications

|                       |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| DC Rating             | 21A 14V DC                                                          |
| AC Rating             | 20A 125V AC, 10A 277V AC,<br>1 1/2HP 125-250V AC 10(4)A 125/250V AC |
| Contact Resistance    | 50m ohm Max                                                         |
| Insulation Resistance | DC 500V 100M ohm Min                                                |
| Dielectric Strength   | AC 1500V 1 minute                                                   |

## Material Specifications

|                                    |                                 |
|------------------------------------|---------------------------------|
| 1 Hex Nut Assy                     |                                 |
| 1 Knurl Nut Assy                   |                                 |
| Operation Temperature              | 1300gf $\pm$ 500gf              |
| Ingress Protection (With WT2 Boot) | IPX6 (Above Mounted Panel Only) |

**Rev**      **Date of issue**   **Revision Notes****Designed**   **Approved**

|   |            |                 |    |    |
|---|------------|-----------------|----|----|
| B | 03-12-2020 | Initial Drawing | RC | OF |
|---|------------|-----------------|----|----|