





NOTES:


Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V-0


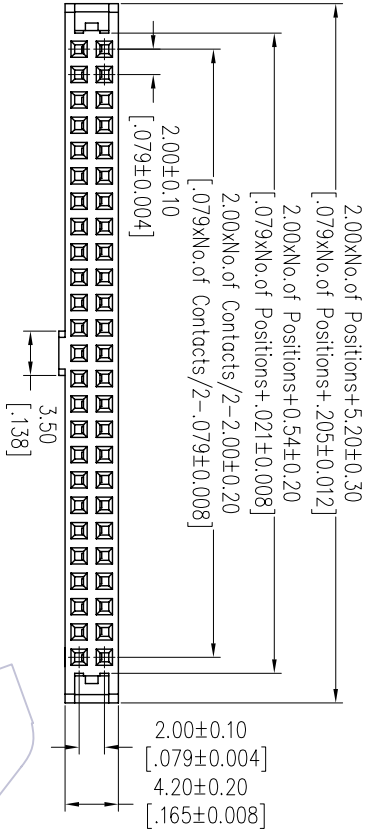


TYPE 2 WITH BUMP

TYPE 1 W/O BUMP

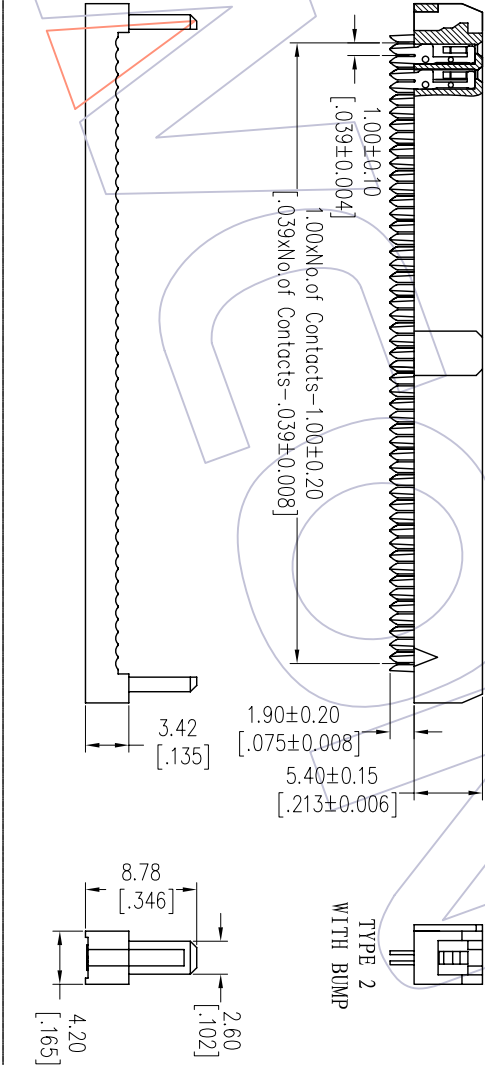

SR P/N: G5220-XXDX01

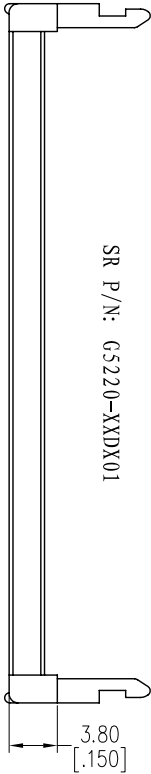

Item	Pitch	Mating
Standard	2.00	3111/3220
Alternate		

TYPE	PART NO.
TYPE 1	5222-XXYPXXBN01
TYPE 2	5222-XXYPXXBW01

Ordering Information

5222-XX Y P XX B X 0 1

Two Parts No. of Pins Contact Plating Color Insulator Bump
Conn-Cover 06P 20P S0=Gold Flash/Ni B=Black N=W/O Bump
08P 30P S3=10u"Gold/Ni G=Grey(427C) W=With Bump
10P 34P S4=15u"Gold/Ni
12P 36P S5=30u"Gold/Ni
14P 40P SN=7um
16P 44P
18P 50P
20P 60P
22P 64P
24P

		OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
		XX		JYHuang		2012/10/10		UNIT		mm		SEE TABLE	
		XX.XX		CHECK		DATE		SIZE		A4		TITLE:	
		X.XXX		±0.15				SHEET		1/1		2.00 IDC SOCKET+SR (ONE SIDE CONTACT)	
		Angle		± 3°		APPROVE		DATE		PROJ.		Customer NO.	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL			

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com