

HSF

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass Or Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material: PBT+30%G.F UL94V-0

6P Without Slot "M" and "N"


8P-12P With Slot "M", Without Slot "N"

14P-64P With Slot "M" and "N"


Ordering Information

5212-XX Y B XX B X 01

	Two Parts	No. of Pins	Contact Material	Color Insulator	Bump
Com+Cover	06P 26P	B=Pass	G=Grey(427C)	N=W/O Bump	
OSR 30P	P=phosphor		W=With Bump		

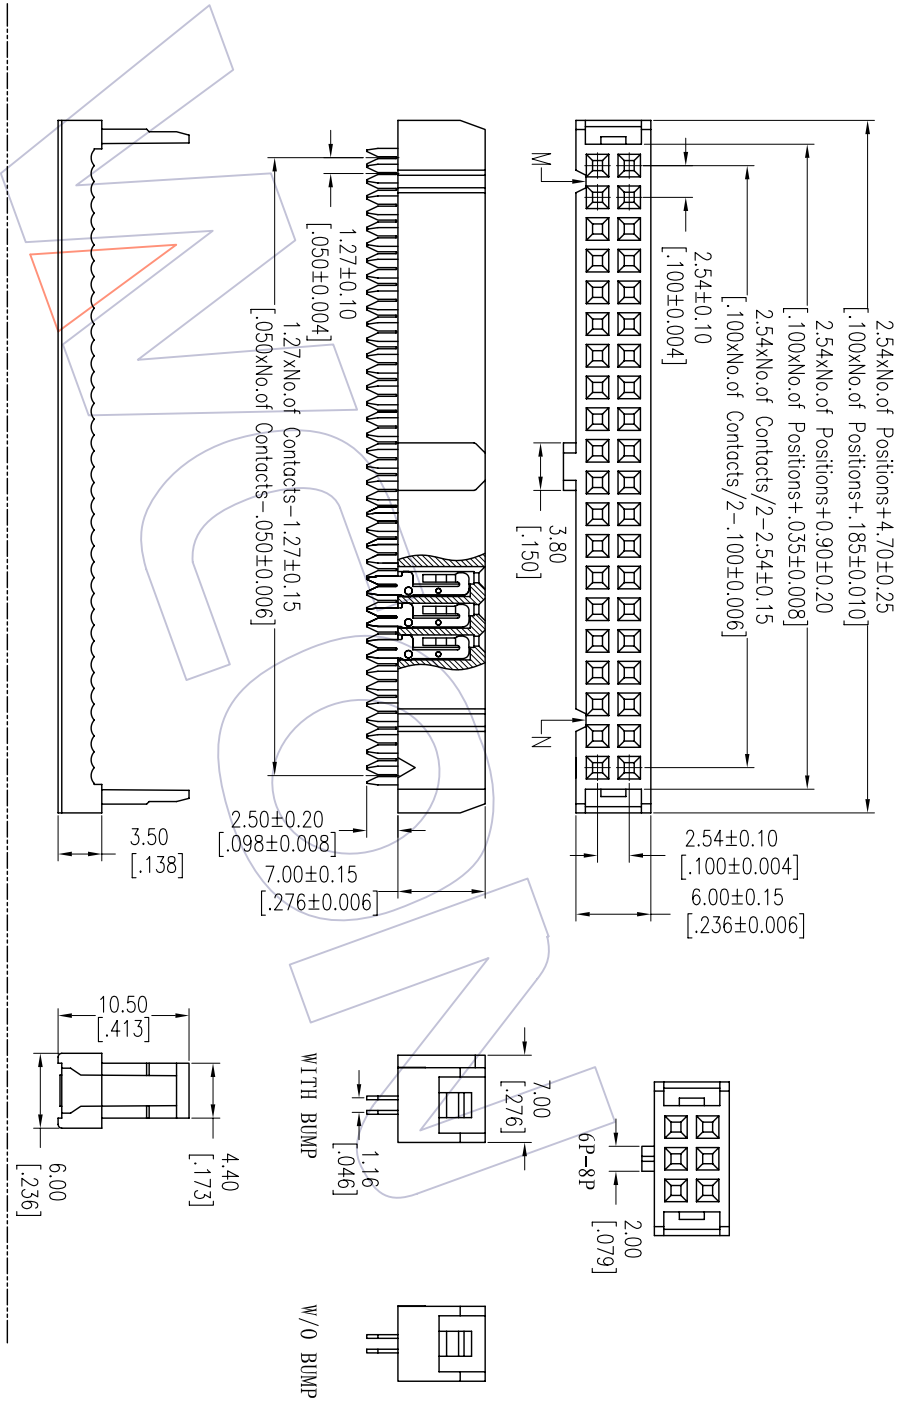

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

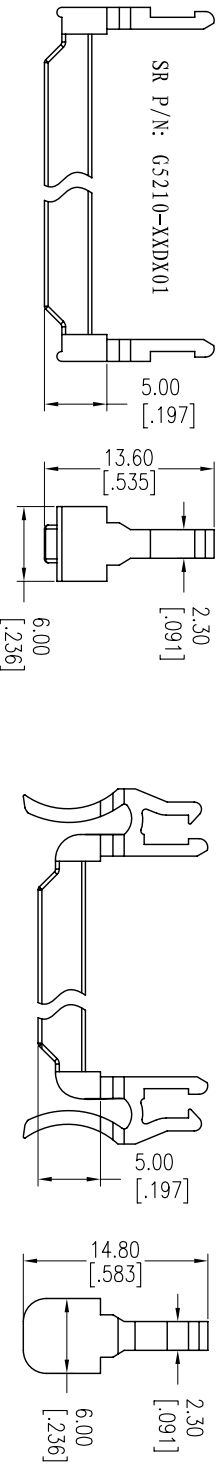[illegible]