

HSE

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass

Contact plating: Au Or Sn over Ni

Latch Material: Zinc Alloy


Latch plating: Ni

Insulator Material: PBT or PA9T+30%G.F UL94V-0

Above 20 Poles With "E" Profile.

Ordering Information

3211 - XX S XX B X X1

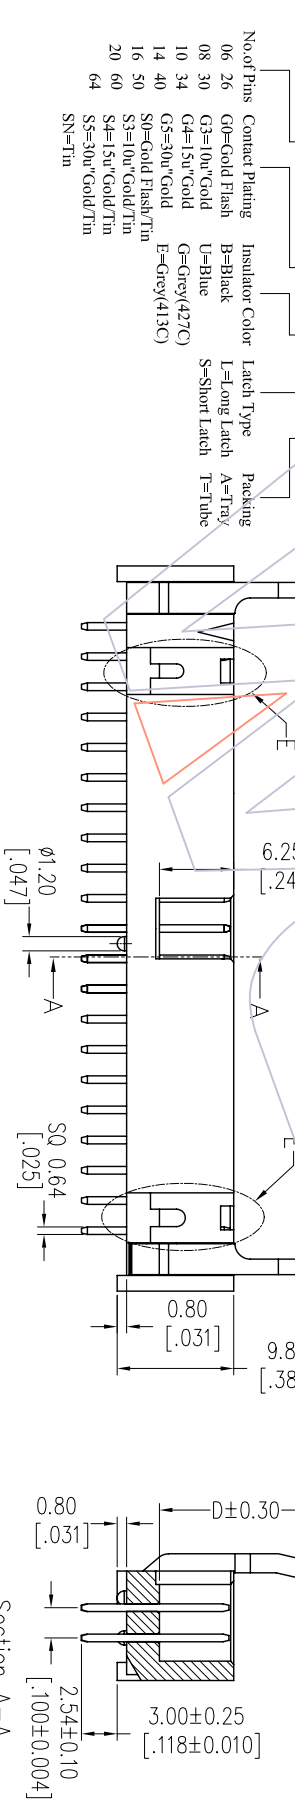


Section A-A

Item	Pitch	Mating
Standard	2.54	5212/5211
Alternate		

Dimension antitheses list	
PART NO	D
3211-XXSXXBLX1	14.55
3211-XXSXXBSX1	10.65

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

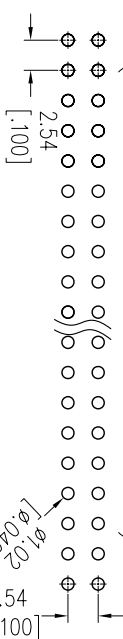

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com
				X.X	JYHuang	2012/10/08	UNIT	mm	SPE TAB	
				X.XX	CHECK	DATE	SIZE	A4	TITLE:	
				X.XXX			SHEET	1/1	2.54 EJECTOR HEADER 180° METAL LATCH H=9.8	
A0	2012/10/08	NEW	-----	Angle	APPROVE	DATE	PROJ.		Customer NO.	
				DIM	TOL					WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
										WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com