



QNHCHIP

QN74LVC1G126

# Product Specification

## QN74LVC1G126

---

Single Bus Buffer Gate With 3-State Output



## DESCRIPTIONS

The single buffer is designed for 1.65V to 5.5V  $V_{CC}$  operation. The QN74LVC1G126 device is single line driver with 3-state output. The output is disabled when the output-enable input is low.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pulldown resistor, the minimum value of the resistor is determined by the current-sourcing capability of the driver.

The QN74LVC1G126 is available in Green SOT23-5 and SC70-5 packages. It operates over an ambient temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

## FEATURES

- **Operating Voltage Range: 1.65V to 5.5V**
- **Low Power Consumption: 0.1 $\mu\text{A}$  (TYP)**
- **Operating Temperature Range:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$**
- **Inputs Accept Voltage to 5.5V**
- **$\pm 24\text{mA}$  Output Drive at  $V_{CC}=3.0\text{V}$**
- **Latch-up Performance Exceeds 100mA**
- **Micro Size Packages: SOT23-5, SC70-5**

## APPLICATIONS

- **AV Receiver**
- **Cable Modem Termination Systems**
- **Digital Picture Frame (DPF)**
- **High-Speed Data Acquisition and Generation**
- **Motor Controls: High-Voltage**
- **Personal Navigation Device (GPS)**
- **Portable Media Player**
- **Video Communication Systems**


## PACKAGE/ORDERING INFORMATION <sup>(1)</sup>

| PRODUCT      | ORDERING NUMBER  | TEMPERATURE RANGE                               | PACKAGE LEAD          | PACKAGE MARKING <sup>(2)</sup> | MSL <sup>(3)</sup> | PACKAGE OPTION      |
|--------------|------------------|-------------------------------------------------|-----------------------|--------------------------------|--------------------|---------------------|
| QN74LVC1G126 | QN74LVC1G126DCKR | $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ | SC70-5 <sup>(4)</sup> | CNK                            | MSL3               | Tape and Reel, 3000 |
|              | QN74LVC1G126DBVR | $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ | SOT23-5               | C265                           | MSL3               | Tape and Reel, 3000 |

NOTE:

- (1) This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document.
- (2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.
- (3) MSL, The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications.
- (4) Equivalent to SOT353.

## SIMPLIFIED SCHEMATIC

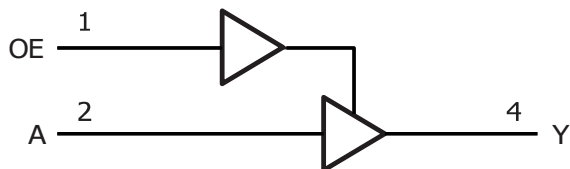

## FUNCTION TABLE

| INPUTS |   | OUTPUT |
|--------|---|--------|
| OE     | A | Y      |
| H      | H | H      |
| H      | L | L      |
| L      | X | Z      |

H=HIGH Logic Level


L =LOW Logic Level

X=Don't Care

Z=High-impedance OFF-state



## PIN CONFIGURATION AND FUNCTIONS (TOP VIEW)

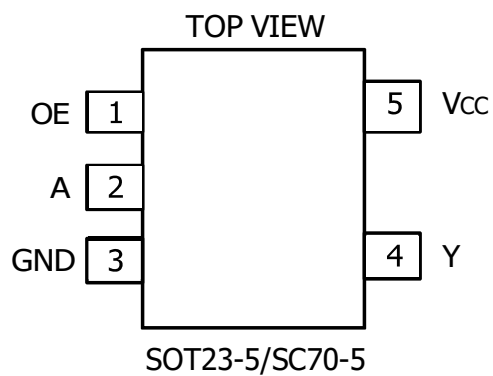

| PIN | NAME            | I/O | FUNCTION        |
|-----|-----------------|-----|-----------------|
| 1   | OE              | I   | OE Enable/Input |
| 2   | A               | I   | A Input         |
| 3   | GND             | -   | Ground Pin      |
| 4   | Y               | O   | Y Output        |
| 5   | V <sub>CC</sub> | -   | Power Pin       |



## REVISION HISTORY

Note: Page numbers for previous revisions may differ from page numbers in the current version.

| VERSION | Change Date | Change Item               |
|---------|-------------|---------------------------|
| Rev A.1 | 2026/06/10  | Initial version completed |



## Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) <sup>(1) (2)</sup>

|                 |                                                                                             | MIN               | MAX                  | UNIT    |
|-----------------|---------------------------------------------------------------------------------------------|-------------------|----------------------|---------|
| V <sub>CC</sub> | Supply voltage range                                                                        | -0.5              | 6.5                  | V       |
| V <sub>I</sub>  | Input voltage range <sup>(2)</sup>                                                          | -0.5              | 6.5                  | V       |
| V <sub>O</sub>  | Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup> | -0.5              | 6.5                  | V       |
| V <sub>O</sub>  | Voltage range applied to any output in the high or low state <sup>(2)(3)</sup>              | -0.5              | V <sub>CC</sub> +0.5 | V       |
| I <sub>IK</sub> | Input clamp current                                                                         | V <sub>I</sub> <0 |                      | -50 mA  |
| I <sub>OK</sub> | Output clamp current                                                                        | V <sub>O</sub> <0 |                      | -50 mA  |
| I <sub>O</sub>  | Continuous output current                                                                   |                   |                      | ±50 mA  |
|                 | Continuous current through V <sub>CC</sub> or GND                                           |                   |                      | ±100 mA |

## Package Thermal Impedance

|                 | PARAMETER                                |         | MIN | MAX | UNIT |
|-----------------|------------------------------------------|---------|-----|-----|------|
| θ <sub>JA</sub> | Package thermal impedance <sup>(4)</sup> | SOT23-5 |     | 230 | °C/W |
|                 |                                          | SC70-5  |     | 380 |      |

## Temperature

|             | PARAMETER                                           |  | MIN | MAX | UNIT |
|-------------|-----------------------------------------------------|--|-----|-----|------|
| Temperature | Junction temperature, T <sub>J</sub> <sup>(5)</sup> |  | -65 | 150 | °C   |
|             | Storage temperature, T <sub>stg</sub>               |  | -65 | 150 |      |

## ESD Ratings

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

|                            | VALUE | UNIT |  <b>ESD SENSITIVITY CAUTION</b><br>ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications. |
|----------------------------|-------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Human-Body Model (HBM)     | ±4000 | V    |                                                                                                                                                                                                                                                                                                                                                                                   |
| Charged-Device Model (CDM) | ±1000 |      |                                                                                                                                                                                                                                                                                                                                                                                   |
| Machine Model (MM)         | ±200  |      |                                                                                                                                                                                                                                                                                                                                                                                   |

NOTE:

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the Recommended Operating Conditions table.
- (4) The package thermal impedance is calculated in accordance with JEDEC-51.
- (5) The maximum power dissipation is a function of T<sub>J(MAX)</sub>, R<sub>θJA</sub>, and T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is P<sub>D</sub> = (T<sub>J(MAX)</sub> - T<sub>A</sub>) / R<sub>θJA</sub>. All numbers apply for packages soldered directly onto a PCB.



## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (TYP values are at  $T_A = +25^{\circ}\text{C}$ , unless otherwise noted.) <sup>(1)</sup>

### Recommended Operating Conditions

| PARAMETER                     | SYMBOL     | TEST CONDITIONS                                                    | MIN                  | MAX                 | UNIT               |
|-------------------------------|------------|--------------------------------------------------------------------|----------------------|---------------------|--------------------|
| Supply Voltage                | $V_{CC}$   | Operating                                                          | 1.65                 | 5.5                 | V                  |
|                               |            | Data retention only                                                | 1.5                  | 5.5                 |                    |
| High-Level Input Voltage      | $V_{IH}$   | $V_{CC}=1.65\text{V to }1.95\text{V}$                              | $0.65 \times V_{CC}$ |                     | V                  |
|                               |            | $V_{CC}=2.3\text{V to }2.7\text{V}$                                | 1.7                  |                     |                    |
|                               |            | $V_{CC}=3\text{V to }3.6\text{V}$                                  | 2.2                  |                     |                    |
|                               |            | $V_{CC}=4.5\text{V to }5.5\text{V}$                                | $0.7 \times V_{CC}$  |                     |                    |
| Low-Level Input Voltage       | $V_{IL}$   | $V_{CC}=1.65\text{V to }1.95\text{V}$                              |                      | $0.3 \times V_{CC}$ | V                  |
|                               |            | $V_{CC}=2.3\text{V to }2.7\text{V}$                                |                      | 0.7                 |                    |
|                               |            | $V_{CC}=3\text{V to }3.6\text{V}$                                  |                      | 0.8                 |                    |
|                               |            | $V_{CC}=4.5\text{V to }5.5\text{V}$                                |                      | $0.3 \times V_{CC}$ |                    |
| Input Voltage                 | $V_I$      |                                                                    | 0                    | 5.5                 | V                  |
| Output Voltage                | $V_O$      |                                                                    | 0                    | $V_{CC}$            | V                  |
| Input Transition Rise or Fall | $t_r, t_f$ | $V_{CC}=1.8\text{V} \pm 0.15\text{V}, 2.5\text{V} \pm 0.2\text{V}$ |                      | 20                  | ns/V               |
|                               |            | $V_{CC}=3.3\text{V} \pm 0.3\text{V}$                               |                      | 10                  |                    |
|                               |            | $V_{CC}=5\text{V} \pm 0.5\text{V}$                                 |                      | 5                   |                    |
| Operating Temperature         | $T_A$      |                                                                    | -40                  | +125                | $^{\circ}\text{C}$ |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.



## DC Characteristics

| PARAMETER        | TEST CONDITIONS          | V <sub>CC</sub>                                                            | TEMP          | MIN <sup>(2)</sup>   | TYP <sup>(3)</sup> | MAX <sup>(2)</sup> | UNIT |
|------------------|--------------------------|----------------------------------------------------------------------------|---------------|----------------------|--------------------|--------------------|------|
| V <sub>OH</sub>  | I <sub>OH</sub> = -100μA | 1.65V to 5.5V                                                              |               | V <sub>CC</sub> -0.1 |                    |                    |      |
|                  | I <sub>OH</sub> = -4mA   | 1.65V                                                                      |               | 1.2                  |                    |                    |      |
|                  | I <sub>OH</sub> = -8mA   | 2.3V                                                                       |               | 1.9                  |                    |                    |      |
|                  | I <sub>OH</sub> = -16mA  |                                                                            | Full          | 2.4                  |                    |                    | V    |
|                  | I <sub>OH</sub> = -24mA  | 3V                                                                         |               | 2.3                  |                    |                    |      |
|                  | I <sub>OH</sub> = -32mA  | 4.5V                                                                       |               | 3.8                  |                    |                    |      |
| V <sub>OL</sub>  | I <sub>OL</sub> = 100μA  | 1.65V to 5.5V                                                              |               |                      |                    | 0.1                |      |
|                  | I <sub>OL</sub> = 4mA    | 1.65V                                                                      |               |                      |                    | 0.45               |      |
|                  | I <sub>OL</sub> = 8mA    | 2.3V                                                                       |               |                      |                    | 0.3                |      |
|                  | I <sub>OL</sub> = 16mA   |                                                                            | Full          |                      |                    | 0.4                | V    |
|                  | I <sub>OL</sub> = 24mA   | 3V                                                                         |               |                      |                    | 0.55               |      |
|                  | I <sub>OL</sub> = 32mA   | 4.5V                                                                       |               |                      |                    | 0.55               |      |
| I <sub>I</sub>   | A or OE inputs           | V <sub>I</sub> =5.5V or GND                                                | 0V to 5.5V    | +25°C<br>Full        | ±0.1               | ±5                 | μA   |
| I <sub>off</sub> |                          | V <sub>I</sub> or V <sub>O</sub> =5.5V                                     | 0V            | +25°C<br>Full        | ±0.1               | ±10                | μA   |
| I <sub>OZ</sub>  |                          | V <sub>O</sub> =0V to 5.5V                                                 | 3.6V          | Full                 |                    | 10                 | μA   |
| I <sub>CC</sub>  |                          | V <sub>I</sub> =5.5V or GND, I <sub>O</sub> =0                             | 1.65V to 5.5V | +25°C<br>Full        | 0.1                | 10                 | μA   |
| ΔI <sub>CC</sub> |                          | One input at V <sub>CC</sub> -0.6V, Other inputs at V <sub>CC</sub> or GND | 3V to 5.5V    | Full                 |                    | 500                | μA   |

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation.

(2) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.

(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.



### Switching Characteristics, $C_L=15\text{pF}$

over recommended operating free-air temperature range ( $-40^\circ\text{C}$  to  $125^\circ\text{C}$ , unless otherwise noted.)<sup>(1)</sup>

| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}=1.8\text{V}\pm0.15\text{V}$ | $V_{CC}=2.5\text{V}\pm0.2\text{V}$ | $V_{CC}=3.3\text{V}\pm0.3\text{V}$ | $V_{CC}=5\text{V}\pm0.5\text{V}$ | UNIT |
|-----------|-----------------|----------------|-------------------------------------|------------------------------------|------------------------------------|----------------------------------|------|
|           |                 |                | TYP                                 | TYP                                | TYP                                | TYP                              |      |
| $t_{pd}$  | A               | Y              | 6.1                                 | 3.7                                | 3.9                                | 2.1                              | ns   |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

### Switching Characteristics, $C_L=30\text{pF}$ or $50\text{pF}$

over recommended operating free-air temperature range ( $-40^\circ\text{C}$  to  $125^\circ\text{C}$ , unless otherwise noted.)<sup>(1)</sup>

| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}=1.8\text{V}\pm0.15\text{V}$ | $V_{CC}=2.5\text{V}\pm0.2\text{V}$ | $V_{CC}=3.3\text{V}\pm0.3\text{V}$ | $V_{CC}=5\text{V}\pm0.5\text{V}$ | UNIT |
|-----------|-----------------|----------------|-------------------------------------|------------------------------------|------------------------------------|----------------------------------|------|
|           |                 |                | TYP                                 | TYP                                | TYP                                | TYP                              |      |
| $t_{pd}$  | A               | Y              | 8.6                                 | 5.3                                | 4.0                                | 2.9                              | ns   |
| $t_{en}$  | OE              | Y              | 9.5                                 | 5.8                                | 5.0                                | 3.3                              | ns   |
| $t_{dis}$ | OE              | Y              | 7.4                                 | 4.3                                | 4.4                                | 3.0                              | ns   |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

### Operating Characteristics

$T_A=25^\circ\text{C}$

| PARAMETER |                   |                 | TEST<br>CONDITIONS | $V_{CC}=1.8\text{V}$<br>TYP | $V_{CC}=2.5\text{V}$<br>TYP | $V_{CC}=3.3\text{V}$<br>TYP | $V_{CC}=5\text{V}$<br>TYP | UNIT |
|-----------|-------------------|-----------------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|------|
| $C_{pd}$  | Power Dissipation | Output Enabled  | $f=10\text{MHz}$   | 18                          | 18                          | 19                          | 21                        | pF   |
|           | Capacitance       | Output Disabled |                    | 2                           | 2                           | 2                           | 4                         |      |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.



## PARAMETER MEASUREMENT INFORMATION


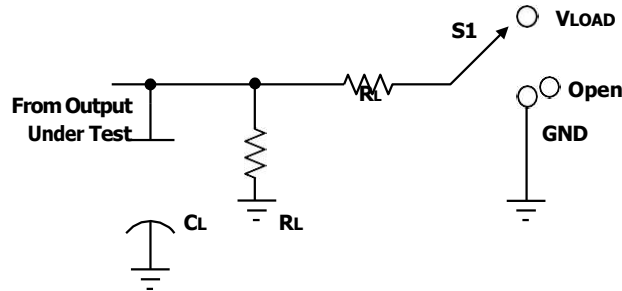


Figure 1. Load Circuit and Voltage Waveforms

| TEST                                |  |  |  |  | S1                |  |  |  |  |
|-------------------------------------|--|--|--|--|-------------------|--|--|--|--|
| t <sub>PLH</sub> /t <sub>PHL</sub>  |  |  |  |  | Open              |  |  |  |  |
| t <sub>PLZ</sub> /t <sub>PZL</sub>  |  |  |  |  | V <sub>LOAD</sub> |  |  |  |  |
| t <sub>PH Z</sub> /t <sub>PZH</sub> |  |  |  |  | GND               |  |  |  |  |

| V <sub>CC</sub> |                 | INPUTS                         |                    | V <sub>M</sub>      | V <sub>LOAD</sub> | C <sub>L</sub> |     | R <sub>L</sub> | V <sub>Δ</sub> |
|-----------------|-----------------|--------------------------------|--------------------|---------------------|-------------------|----------------|-----|----------------|----------------|
|                 | V <sub>I</sub>  | t <sub>r</sub> /t <sub>f</sub> |                    |                     |                   |                |     |                |                |
| 1.8V±0.15V      | V <sub>CC</sub> | ≤2ns                           | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 15pF              | 30pF           | 1MΩ | 1kΩ            | 0.15V          |
| 2.5V±0.2V       | V <sub>CC</sub> | ≤2ns                           | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 15pF              | 30pF           | 1MΩ | 500Ω           | 0.15V          |
| 3.3V±0.3V       | 3V              | ≤2.5ns                         | 1.5V               | 6V                  | 15pF              | 50pF           | 1MΩ | 500Ω           | 0.3V           |
| 5V±0.5V         | V <sub>CC</sub> | ≤2.5ns                         | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 15pF              | 50pF           | 1MΩ | 500Ω           | 0.3V           |

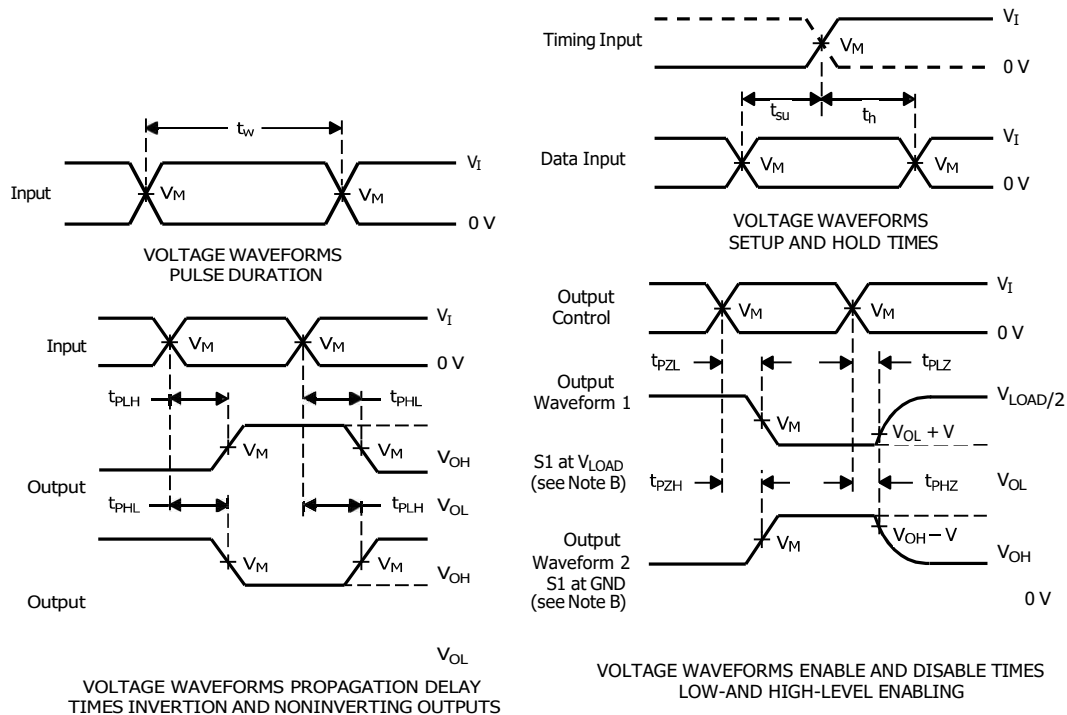

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>o</sub> = 50 Ω.

D. The outputs are measured one at a time, with one transition per measurement.

E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dls</sub>.




- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.




## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

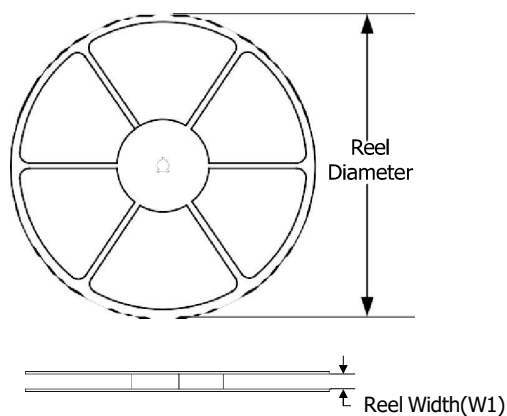

### TAPE DIMENSION

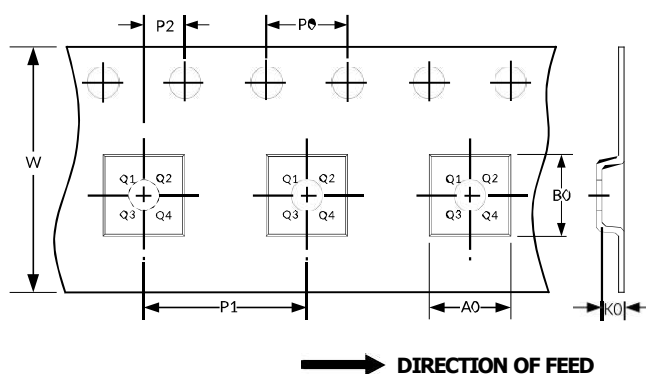

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|-----------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SC70-5       | 7"            | 9.5             | 2.25    | 2.55    | 1.20    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |
| SOT23-5      | 7"            | 9.5             | 3.20    | 3.20    | 1.40    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.





## PACKAGE OUTLINE DIMENSIONS



NOTE:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.
3. This drawing is subject to change without notice.

### SOT23-5 <sup>(3)</sup>

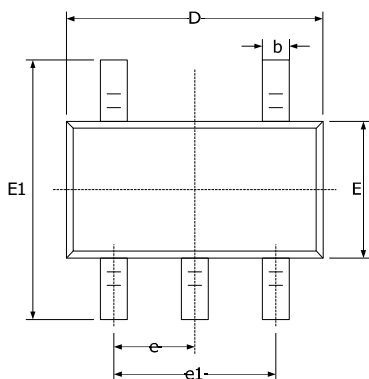

RECOMMENDED LAND PATTERN (Unit: mm)





| Symbol           | Dimensions In Millimeters |       | Dimensions In Inches      |       |
|------------------|---------------------------|-------|---------------------------|-------|
|                  | Min                       | Max   | Min                       | Max   |
| A <sup>(1)</sup> | 1.050                     | 1.250 | 0.041                     | 0.049 |
| A1               | 0.000                     | 0.100 | 0.000                     | 0.004 |
| A2               | 1.050                     | 1.150 | 0.041                     | 0.045 |
| b                | 0.300                     | 0.500 | 0.012                     | 0.020 |
| c                | 0.100                     | 0.200 | 0.004                     | 0.008 |
| D <sup>(1)</sup> | 2.820                     | 3.020 | 0.111                     | 0.119 |
| E <sup>(1)</sup> | 1.500                     | 1.700 | 0.059                     | 0.067 |
| E1               | 2.650                     | 2.950 | 0.104                     | 0.116 |
| e                | 0.950(BSC) <sup>(2)</sup> |       | 0.037(BSC) <sup>(2)</sup> |       |
| e1               | 1.800                     | 2.000 | 0.071                     | 0.079 |
| L                | 0.300                     | 0.600 | 0.012                     | 0.024 |
| θ                | 0°                        | 8°    | 0°                        | 8°    |





NOTE:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.
3. This drawing is subject to change without notice.

**SC70-5 <sup>(3)</sup>**

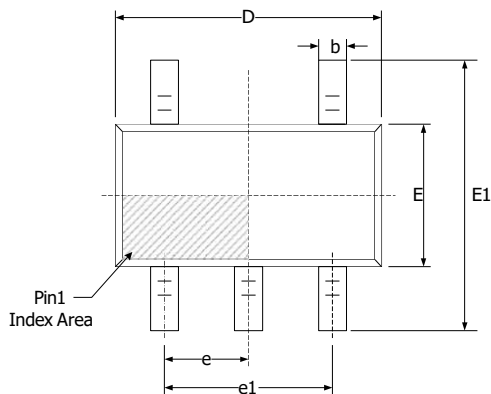

**RECOMMENDED LAND PATTERN (Unit: mm)**



| Symbol           | Dimensions In Millimeters |       | Dimensions In Inches      |       |
|------------------|---------------------------|-------|---------------------------|-------|
|                  | Min                       | Max   | Min                       | Max   |
| A <sup>(1)</sup> | 0.900                     | 1.100 | 0.035                     | 0.043 |
| A1               | 0.000                     | 0.100 | 0.000                     | 0.004 |
| A2               | 0.900                     | 1.000 | 0.035                     | 0.039 |
| b                | 0.150                     | 0.350 | 0.006                     | 0.014 |
| c                | 0.080                     | 0.150 | 0.003                     | 0.006 |
| D <sup>(1)</sup> | 2.000                     | 2.200 | 0.079                     | 0.087 |
| E <sup>(1)</sup> | 1.150                     | 1.350 | 0.045                     | 0.053 |
| E1               | 2.150                     | 2.450 | 0.085                     | 0.096 |
| e                | 0.650(BSC) <sup>(2)</sup> |       | 0.026(BSC) <sup>(2)</sup> |       |
| e1               | 1.300(BSC) <sup>(2)</sup> |       | 0.051(BSC) <sup>(2)</sup> |       |
| L                | 0.260                     | 0.460 | 0.010                     | 0.018 |
| L1               | 0.525                     |       | 0.021                     |       |
| θ                | 0°                        | 8°    | 0°                        | 8°    |