

SLIDE SWITCH

碩方精密電子開關

 www.Sofeng.com

Operation: SMT/卧式侧拨小型 6PIN 二挡位包脚型 滑动开关 [柄长可定制]



ITEM NO.: MS-202K (Series)

(L9.20mm×W3.60mm×H3.50mm SLIDE-SWITCH)

表面贴装 SMT

側向操作

精密部品 NICETY

可靠 STABILIZE


適合環保 RoHS

Technical parameter

LEVEL		A[better product]	B[average product]
PROJECT			
Electrical Properties	Contact Rating	0.5A, 30V DC	
	Initial Contact Resistance	50mΩ max.	
	Insulation Resistance	100MΩ min.500V DC Skey/PD: 100MΩ min.300V DC	
Durable Performance	Withstand Voltage	300V AC for 1 minute	250 V AC for 1 minut
	There No Load	15,000 Cycles	10,000 Cycles
	Rated Load	12,000 Cycles	8,500 Cycles
Storage temp.		-25℃~+75℃(Operating Temp:)	
Operating Force		2.6N. (1N.=100gram-force) ±0.5N	
Heat Rrsistance		IR Reflow:255℃, 5sec. Manual:350℃, 3sec.	

Material declaration		
No.	NAME	Description
1	拨柄	PA46 耐热尼龙塑料
2	盖板	C5191R-H 磷铜(镀银)
3	基座	LCP 30%G/F (Black)耐热塑胶
4	弹片	Beryllium bronze 铍青铜(单面镀银)
5	嵌件	C5191R-H 磷铜(镀银)

CIRCUIT DIAGRAM









Unit:mm

MS-202K - XX


产品型号

拨柄高度
G2=2.0mm
G3=3.0mm
G4=4.0mm

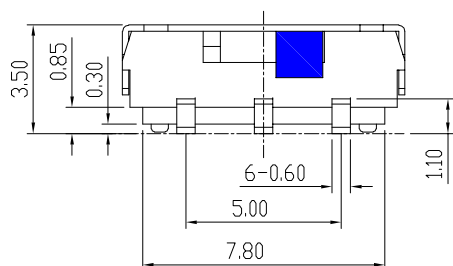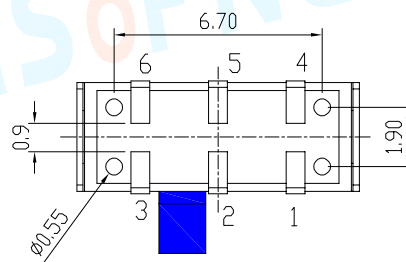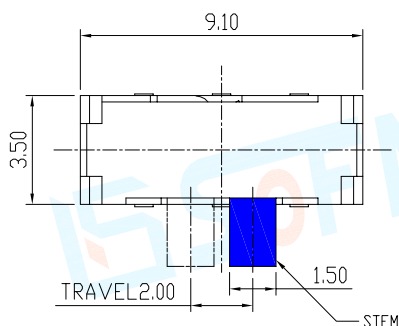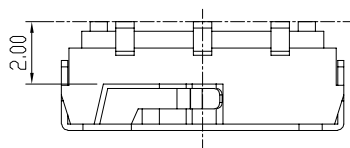

H
2.0
3.0
4.0

P.C.B LAYOUT



推荐锡膏厚度

0.12mm

